

26 July 1999

Mike McBride
Facilities Planner/Environmental
Multnomah County Facilities Management
2505 S.E. 11th Avenue
Portland, Oregon 97202

Re: Review of Environmental Reports for 2124 N. Williams Property, Portland, Oregon

Dear Mr. McBride:

PBS has reviewed a variety of reports regarding the above referenced property. These reports documented environmental contamination issues associated with various occupants of the property. It is PBS' understanding that the County is in the process of acquiring this property. The following are concerns that PBS has identified associated the environmental conditions on the site.

- 1) According to the Prospective Purchaser Agreement; DEQ No. 98-05, the purchaser would need to prove that contamination existed at the time of the purchase in order to be indemnified from liability associated with that release. With this in mind, the reports reviewed by PBS only characterized discrete portions of the property. PBS observed no information regarding the characterization of groundwater on the subject property. Additionally PBS observed no information regarding the characterization of soils beneath the buildings other than the areas associated with catchbasins and drywells. PBS recommends that a more thorough physical evaluation of the soils and groundwater be performed before purchasing the property. The focus of this investigation should be on, but not limited to, groundwater on the site and soils that may be disturbed during any future development activities on the site.
- 2) Reports reviewed indicated that interior and exterior surfaces of the buildings on the site may be contaminated with lead containing dust. This contamination could present a significant obstacle to the re-development of the structures. Prior to purchasing this property, a thorough assessment of the buildings' existing lead dust contamination should be established.
- 3) PBS found no information regarding the decommissioning of USTs on the site. One of the historical uses of the subject property was as an auto repair facility and garage. Prior to purchasing this property, a UST survey should be performed on the property. Any out-of-service USTs should be decommissioned and confirmation soil samples should be tested for contamination. Soil samples from all identified former UST locations should be tested for evidence of contamination.

Mike McBride Multnomah County Facilities 26 July 1999 Page 2

- The paved area between the two main building may have been used for the disposal of waste chemicals associated with the manufacture of batteries. Soils beneath this paved area should be tested for evidence of contamination.
- 5) The investigations completed to date on the subject property have focused primarily on activities associated with battery manufacturing issues. A Phase I Environmental Site Assessment should be completed to identify any other potential environmental impairments on the property.

If you would like to discuss some of these issues, or would like a proposal to perform additional site-specific studies, please contact me at your convenience. My direct line is 417-7597.

Sincerely,

Douglas Hancock

Senior Project Manager

QUITCLAIM DEED-STATUTORY PORM THIS DEED IS BEING INDIVIDUAL GRANTOR RERECORDED Alice A. Hindman see and quitclaims to ALICE A. HINDMAN, CAROL ANN COFFMAN and BRUCE E. HINDMAN, Co-Trustees of the Alice A. Hindman Revocable Trust ... County, Oregon, to-wit: real property situated in The West 85 feet of Lots 25 and 26, and the South 10 feet of the West 85 feet of Lot 24, Block 23, ALBIMA, City of Portland, and That part of Lots 24, 25, and 26, Block 23, ALBINA, in the City of Portland, County of Multnomah and State of Oregon, described as follows, to-wit: Beginning at the southeast corner of said Lot 26, and thence running northerly along the east lines of said lots, 110 feet, thence westerly and parellel with the south line of said Lot 24, 40 feet; thence southerly and parallel with the east lines of said lots, 110 feet to the south line of said Lot 26, and thence easterly 40 feet to the place of beginning. Also known as 2110 H and will lamb a Portland of Caralyness size; Parcel No R00960 8230 weyance is \$ __0__ (Here comply with the requirements of ORS 93.030) .

Transfer to Revocable Trust The true consideration for this conveyance is \$....-0-.... day ol Dated this Alice n. Mindman STATE OF OREGON, County of .. OFFICIAL BEAL en tl :: OLLEEM T. POWELL
HOTARY PUBLIC - OREGON
COMMISSION NO.017140
MY COMMISSION EUPIRES AUG. 01, 1996 Notary Public for Oregon QUITCLAIM DEED CTATE OF OREGON, Alice A. Hindman Alice A. Hindman Revocalbe Trust GRAMTEE'S ADDRESS, IIP After recording return for George J. Gregores 222 SW Columbia, Suite 1800 Portland, OR 97201 Until a change is requested, all tax states shall be sent to the following address: 2124 N. Williams Ave. Portland, OR 97227 By . .. 96. -21714

ADDENDUM TO CONTRACT

The parties agree and understand that PCDC will be remodeling the middle building and pulling up the old floor. The parties agree and understand that there may be pollutants unearthed in that process which must be removed.

To the extent that the pollution issues can be remediated to DEQ's satisfaction by capping with a new concrete floor, PCDC will be solely responsible for the expense of capping. To the extent that there is unusual expense incurred for removal of the old flooring because of pollutants which were on the premises prior to the purchase of the property, PCDC will bear of cost of standard removal and disposal and Seller will bear the difference.

Seller shall pay for the cost of any remediation (including any removal) of any pollutants which were on the property prior to the purchase of the property. DEQ shall be the final arbiter of what pollutants need remediation and the method for that remediation. Buyer shall pay for the cost of any remediation of any pollutant which is brought to the property after the purchase of the property.

In the event that the property is affected by flood, fire, change in water table, change in water flow, other disaster, or other unforeseen circumstances which expose pollutants giving rise to the requirement of remediation, Seller shall be responsible for all pollutants on the property prior to the sale and Buyer shall be responsible for all pollutants on the property after the sale.

In the event that Seller is in dispute with DEQ over the necessity of remediation, DEQ's instructed process for remediation or the method of remediation instructed by DEQ, Buyer shall still be entitled to go forward with the remediation indicated by DEQ.

In the event that remediation of pollutants is required of Seller, Buyer may opt to employ a contractor for the remediation and may deduct the reasonable cost of remediation from the contract price, in the event that the balance has not yet been paid in full. Buyer will consult with Seller in identifying an appropriate contractor.

98181538 12:36pm 10/08/98

001 20020244 02 16 A01 17 0.00 85.00 3.00 0.00 0.00 0.00

PROSPECTIVE PURCHASER AGREEMENT

DEQ No. __98-05

BETWEEN: Oregon Department of Environmental Quality

AND:

Port City Development Center P/U 10/8

EFFECTIVE DATE:

(Date of last signature below)

This Agreement is entered between the Oregon Department of Environmental Quality (DEQ) and Port City Development Center pursuant to ORS 465.260 and 465.327. This Agreement contains the following provisions:

Table of Contents

	Page
1: Recitals	2
2. Measures to be Undertaken	4
3. General Provisions	7
A. DEQ Oversight	. 7
B. Access	7
C. Use Restrictions	8
D. Project Managers	9
E. Progress Reports	9
F. DEQ Costs	10
G. Dispute Resolution	11
H. Enforcement of Agreement and	
Reservation of Rights	11
I. Waivers	12
J. Hold Harmless and Indemnification	12.
K. Public Notice	13
L. Recording	13
M. Transfer of Ownership	13
4. Release from Liability	14
5. Parties Bound	15
6. Signatures	16
Attachment A Legal Description of Property	

waived. Port City Development Center shall be invoiced monthly for these costs and shall make payments in accordance with Section 3.F of this Agreement.

- D. Port City Development Center is a non-profit corporation and a "person" within the meaning of ORS 465.200(20). According to information provided by Port City Development Center, Port City Development Center is not currently liable under ORS 465.255 for the release of hazardous substances existing at the facility as of the date of this Agreement.
- E. Port City Development Center shall work under the oversight of DEQ's Voluntary Cleanup Program to perform the investigation and remedial activities described in Section 2 of this Agreement. Port City Development Center intends to develop the Property for use as a vocational work center for developmentally disabled youths and adults in the Portland metropolitan area. Port City Development Center employs approximately 84 developmentally disabled individuals and an additional 22 supervisors. By moving to this new Property, Port City Development Center will be able to have sufficient space to develop and implement a School-to-Work program which will give disabled high school students an opportunity to develop their work skills, upon anticipation of entering the workforce after graduation. Based upon this information, DEQ has determined that Port City Development Center's proposed activities at the facility will not contribute to or exacerbate existing contamination, increase health risks, or interfere with remedial measures necessary at the Property. DEQ further has determined that a "substantial public benefit" will result from this Agreement, within the meaning of ORS 465.327 (1)(d).

- etc.) along the entire eastern side of Building #1, extending two feet from the outside wall of the building. If physical changes are made to this two foot strip along the eastern side of Building #1 which result in exposing contaminated soils, Port City Development Center shall further evaluate the contamination, and is responsible for any remediation DEQ determines to be necessary.
- (2) Sump #1: A pocket of lead and TPH contaminated soil exists below Sump #1 in the northern portion of Building #1. Port City Development Center shall make physical alterations to the floor in the northern portion of Building #1, thereby changing the conditions of the Property. To prevent exposure of contaminated soils, Port City Development Center shall place and maintain a protective concrete cap over the sump. In the event that Port City Development Center significantly alters the northern portion of Building #1 such that the majority of the ground surface below the building structure is exposed, Port City Development Center shall be one of the parties potentially responsible for investigating and remediating any contaminated soils which may be discovered. Remedial activities may include: capping, treatment in place, or excavation and disposal. Such activities shall occur under DEQ's oversight and direction.
- (3) Remediation of contaminated soils, if necessary, shall include any measures necessary to prevent leaching or migration of soil contamination to any other media.
- B. Any development, construction, or other use of the Property shall be consistent with and shall not interfere with any investigative or remedial activities necessary at the Property, or existing contamination. To ensure such consistency and prevent exacerbation of

final remedy selected for the Property. The final remedy for the Property may incorporate, eliminate, or modify the restrictions in Subsection 3.C. of this Agreement. If the restrictions in Subsection 3.C. of this Agreement are incorporated into the final remedy, they will be restated as such and subject to public notice and comment requirements for proposed remedial actions. Any use restrictions contained in a final remedy selected or approved by DEQ after public participation shall supersede the restrictions set forth in Subsection 3.C. of this Agreement.

E. Port City Development Center shall diligently pursue the development and uses of the Property described in Subsection 1.E. of this Agreement.

3. <u>GENERAL PROVISIONS</u>

A. DEO Oversight

DEQ shall provide review, approval/disapproval, and oversight as described in Section 2 and Subsection 3.F.(2) of this Agreement. Where DEQ approval is required for any plan or activity under this Agreement, Port City Development Center shall not proceed to implement the plan or activity until DEQ approval is received.

B. DEO Access

- (1) Port City Development Center grants an irrevocable right of entry to DEQ and its authorized representatives to enter and move freely about the Property at all reasonable times for purposes of overseeing implementation of this Agreement and conducting remedial measures DEQ deems necessary.
- (2) Port City Development Center shall allow DEQ to inspect and copy all records in Port City Development Center's possession or control relating to measures undertaken at the Property under this Agreement. Port City Development Center shall preserve all such records for

- (2) Port City Development Center shall ensure that all employees, agents, occupants, and authorized users of the Property abide by the use restrictions set forth in Paragraph 3.C (1). Pursuant to ORS 465.327(5), such use restrictions shall run with the land.
- (3) The use restrictions required under this Subsection are in addition to and not in lieu of any institutional controls or other remedial measures that DEQ might deem necessary as part of a final remedial action at the Property.

D. <u>Project Managers</u>

All reports, notices, and other communications required under or relating to this Agreement shall be directed to:

Shelia Monroe DEQ - Voluntary Cleanup Program 2020 SW 4th Avenue, Suite 400 Portland, OR 97204 Phone: 229-5445

George Scott
Port City Development Center
1847 E. Burnside
Portland, OR 97214
Phone: 236-9515

E. <u>Progress Reports</u>

Prior to beginning any construction on the Property requiring action pursuant to Section 2 of this Agreement, Port City Development Center shall begin regular reporting to DEQ. On a quarterly basis for the duration of this Agreement, or until the Property receives a No Further Action determination from DEQ, Port City Development Center shall submit to DEQ two (2) copies of a progress report describing its activities at the Property under this Agreement. DEQ anticipates that the progress report will not exceed two (2) pages in length. The progress report shall address, at a minimum, the following:

(1) Activities undertaken by Port City Development Center at the Property during the previous quarter;

shall begin to accrue at the end of the 30-day payment period, unless dispute resolution has been invoked.

G. <u>Dispute Resolution</u>

In the event of any disagreement between DEQ and Port City Development Center regarding implementation of this Agreement, including but not limited to review and approval of a plan or activity or DEQ costs, DEQ and Port City Development Center shall, in the following order:

- (1) Make a good faith effort to resolve the dispute between project managers;
- (2) If necessary, refer the dispute for resolution by the immediate supervisors of the project managers; and
- (3) If necessary, provide to each other their respective positions in writing and refer the dispute for resolution to DEQ's Administrator of the Waste Management and Cleanup Division or Northwest Regional Division Administrator, and Port City Development Center's Executive Director. DEQ's final decision after such dialogue shall be enforceable in accordance with Subsection 3.H. of this Agreement.

H. Enforcement of Agreement and Reservation of Rights

(1) In the event of any failure of Port City Development Center to comply with any obligation of this Agreement, DEQ may enforce this Agreement under ORS 465.260(5) or exercise any authority or pursue any claim or cause of action that DEQ might have. Port City Development Center reserves any defenses or counterclaims it might have in the event of such action by DEQ.

K. Public Notice

- (1) Upon execution of this Agreement, DEQ will provide public notice of this

 Agreement in a local newspaper of general circulation, describing the measures to be undertaken under this Agreement. Copies of the Agreement will be made available to the public. DEQ shall provide Port City Development Center a draft of such notice and consider any comments by Port City Development Center on the draft notice, before publication. Port City Development Center is responsible for the publication costs, if any, of such notice per Subsection 3.F. of this Agreement.
 - (2) Before approval of any remedial action, DEQ will provide public notice and opportunity for comment on the proposed remedy in accordance with ORS 465.320.

L. Recording

Within fourteen (14) days of the effective date of this Agreement, Port City Development Center shall submit a copy or original of this Agreement (whichever is required by the county) to be recorded in the real property records of Multnomah County, State of Oregon. Port City Development Center shall provide DEQ with written evidence of such recording within seven (7) days of recording.

M. Transfer of Ownership

Upon transfer of ownership of the Property, or a portion of the Property, from Port City Development Center to another person or entity, Port City Development Center and the new owner shall provide written notice to the DEQ project manager within thirty (30) days of such transfer.

- (7) Any ownership, operation, or other ground of liability of Port City

 Development Center for a release of hazardous substances at an off-site location affecting the


 Property; and
- (8) Any matters as to which the State of Oregon is owed indemnification under Subsection 3.I of this Agreement.

5. PARTIES BOUND

- A. This Agreement shall be binding on the signatories and their respective commissions, agencies, officers, assigns, successors, employees, contractors, agents, and authorized representatives. The undersigned representative of each party certifies that he or she is fully authorized to execute and bind such party to this Agreement. No change in ownership or corporate or partnership status relating to the Property shall in any way alter Port City Development Center's obligations under this Agreement, unless approved otherwise in writing by DEQ.
- B. The benefits and burdens of this Agreement shall run with the land; however, the release from liability set forth in Subsection 4.A of this Agreement shall limit or otherwise affect the liability only of persons who are not potentially liable under ORS 465.255 for a release of hazardous substances at the Property as of the date of that person's acquisition of ownership or operation of the Property and who assume and are bound by the terms of this Agreement applicable to the Property as of the date of their acquisition of ownership or operation of the Property.

REMEDIAL INVESTIGATION FINAL REPORT WAGSTAFF BATTERY MANUFACTURING CO. PORTLAND, OREGON

December 10, 1997Project No. 18572





Philip Environmental Services Corporation, a subsidiary of Philip Services Corp

> P.O. Box 3552, Seattle, WA 98124 955 Powell Avenue S.W., Renton, WA 98055 (206) 227-0311

1.0 Introduction

Philip Services Corporation (Philip) was contracted by Bruce and Chad Hindman, owners of the Wagstaff Battery Manufacturing Company (Wagstaff) property, to perform site investigation and remediation activities at their facility in Portland, Oregon. The purpose of these activities was to gather information concerning the potential presence of petroleum compounds beneath an interior sump, assess the extent of lead beneath the facility's foundation, to characterize lead concentrations in a grass lot located along the eastern boundary of the property, and to excavate and dispose of approximately 130 tons of lead-impacted soil which had been previously stabilized and buried on-site. The Hindmans have entered the Oregon Department of Environmental Quality's (DEQ) Voluntary Cleanup Program in an effort to mitigate site environmental concerns and solicit a No Further Action (NFA) determination from the DEQ. A property sale is on hold pending issuance of the NFA determination by DEQ.

2.0 SITE LOCATION AND DESCRIPTION

The Wagstaff property is located at 2124 North Williams Avenue, Portland, Oregon (Figures 1). The industrial property is approximately 0.5 acres in size, bounded on the west by North Williams, the east by residential structures, the north by a residential structure and North Thompson Street, and to the south by residential and commercial properties. The site is comprised of two connecting buildings with an unpaved lot on the east side of the property (Figure 2). The site elevation is approximately 140 feet above mean sea level. The legal description of the property is Albina, Lot 4, Block #24, City of Portland, County of Multnomah, State of Oregon.

3.0 SITE GEOLOGY AND HYDROLOGY

The Wagstaff property is located approximately one-half mile northeast of the Willamette River. The site topography is flat with a gentle slope to the south-southwest. The site is situated on the floor of the Portland basin in the northern portion of the Lower Willamette drainage basin. The underlying site geology is made up of coarse sand and silt and Pleistocene flood deposits.

The area's drinking water supply is provided by the Willamette, Tualatin, Columbia and Bull Run watersheds. This is augmented by groundwater extraction from basalt. There are no groundwater wells at the site. The depth to groundwater beneath the site is not known. A Phase I site assessment report identified one active groundwater well within a 1-mile radius. It was drilled to 83 feet below ground surface (bgs) and had a static water level of 55 feet bgs. Shallow groundwater flow beneath the site is estimated to be west-southwest towards the Willamette River. Regionally groundwater flow is towards the north and west following the Columbia River flow.

4.0 SITE HISTORY

The Wagstaff facility has operated an industrial battery manufacturing, servicing, and recycling facility at the site for approximately 35 years. The facility consists of two connecting buildings (Buildings I and II, Figure 2) constructed in 1926 and 1936, respectively. A warehouse addition was added to Building I in 1972. Prior to occupancy by Wagstaff, the site was occupied by an upholstery company and later by a lounge chair manufacturer. Industrial batteries were manufactured on-site from 1962-1991. In 1991 Wagstaff notified the DEQ that they were no longer manufacturing batteries. A June 19, 1997 Oregon Department of Environmental Quality Memorandum noted that Wagstaff produced 800 batteries in 1973 and was producing 500 batteries per year by 1986 using 70 tons of lead and 100 tons of lead ingot. Currently the facility services batteries and acts as a collection point for batteries designated for scrap recycling. A more detailed history of the site is available in a 1992 site assessment report prepared by the Technical Action Group, Inc. ("Phase 1 Environmental Site Assessment, Wagstaff Battery", May 24, 1992, TAG Inc.).

During the period that batteries were manufactured at the site, wastewater from the manufacturing process was pumped to a collection sump in Building I (Figure 2) where lead oxide was allowed to settle out. The water was then pumped into a 3-foot diameter dry-well, formerly located outside the east wall of Building I. The former dry-well extended 18 feet bgs and was set in drain rock.

The eastern portion of the site is a grass lot. The area measures approximately 180 feet in length (north to south) by 42 feet in width (east to west). A concrete foundation for a residential structure is present in the northeast corner of the lot. Weeds and grass cover much of the soil surface. A discharge fan along the east wall of Building I and the roof ventilation fan vent towards this area.

5.0 Previous Investigations

In 1986 the DEQ identified the ventilation fans as a potential pathway for lead migration from the building's interior. The DEQ obtained soil samples from two areas of the grass lot that forms the eastern boundary of the Wagstaff property. Analytical testing of the samples indicated that lead concentrations in the surface soil from these two locations exceeded the current residential cleanup standard of 200 mg/kg total lead. As a result, the DEQ stated concern that these elevated lead concentrations were potentially attributable to fugitive dust from the battery manufacturing process.

The soil surrounding the dry-well was tested in 1993 by Wagstaff Battery. The analytical results indicated that the soil contained lead concentrations in excess of TCLP action levels (5 mg/l). As a result, the dry-well was removed and approximately 100 tons of impacted soil was excavated from this area in 1993. The excavated soil was stockpiled on a concrete pad in the northeast corner of the property and covered with a plastic liner. A layer of gray soil (possibly lead oxide) was visible at the time of the excavation and

appeared to extend beneath the building's foundation. The layer measured approximately 1.5 feet in width, 2 feet in length, and extended from a vertical depth of between 2 and 3 feet bgs to approximately 8 feet bgs. Confirmation samples taken from the excavation side walls and bottom after the excavation was completed indicated that the west wall of the excavation was the only area in which soluble lead concentrations still exceeded 5 mg/l. The soil in this area could not be removed due to its proximity to the building's foundation.

In April 1995, the stockpiled soil was treated by chemical fixation and stabilization (CFS), utilizing cement kiln dust (CKD). This process proved ineffective in reducing the soluble lead levels to below 5 mg/l limit in the TCLP extract. In December 1995, the CFS process was repeated using Portland cement as the reagent. This process proved effective. In 1996, after receiving approval from the DEQ's Solid Waste Program, stabilized soil was backfilled into the former dry-well excavation. The excavation was then capped with a 6-mil plastic cover and 6 inches of clean fill.

In January 1997, samples were taken within the Wagstaff facility from the two sumps that drained to the dry-well. Solid and liquid residue were removed from the sumps and placed in a 55-gallon drum and staged on-site. The concrete bottom of Sump #1 was removed and samples were taken from the underlying soil. Laboratory analytical testing indicated that lead and petroleum hydrocarbons were present at concentrations of 350 mg/kg and 15,000 mg/kg, respectively. Excavation of soil was performed to a depth 5 feet bgs. A hand-auger boring was then advanced to 6 feet bgs and a sample collected. Analytical results indicated that lead and petroleum hydrocarbon concentrations were 19 mg/kg and 9,000 mg/kg, respectively.

Lead was also identified in the soil beneath Sump #2. Affected soil was removed and the underlying soil re-sampled. At a depth of 4 feet bgs, a lead concentration of 15 mg/kg was detected. No further soil removal was performed in either sump.

In April 1997, Wagstaff entered the DEQ Voluntary Cleanup Program. The goals were to develop and institute a program to excavate impacted soil that could be removed without endangering the building foundation or structure and to delineate contaminant levels that would remain on-site due to their inaccessibility. The objective of this program was to bring about site closure with the DEQ and allow sale of the property to proceed without excessive deed restrictions.

6.0 SITE INVESTIGATION ACTIVITIES

6.1 Determine Vertical Extent of TPH Concentration Beneath Sump 1

On October 14, 1997, Philip personnel collected three soil samples from depths of 9, 12, and 15 feet bgs directly beneath Sump 1. Due to limited vertical access in the vicinity of Sump 1, a hand-held, hydraulically driven geo-probe unit was used to drive a 1-inch

split-spoon into the soil. The samples were collected by placing the soil from the split-spoon directly into an 8-ounce glass jar using a pre-cleaned stainless steel spoon. After collection, the samples were placed in an iced cooler until delivery to the laboratory. The samples were submitted to North Creek Analytical Laboratory and analyzed for TPH using Method 418.1, Polynuclear Aromatic Hydrocarbons (PAHs) using the Selective Ion Methodology (SIM), and pH.

6.2 Assess the Extent of Lead Contamination, West Wall of Building I

On October 15, 1997, samples were collected to quantify the extent of lead-impacted soil beneath the foundation of the building near the area of the former dry-well. Samples were collected from depths of 2, 5, 8, and 10 feet bgs from three locations around the perimeter of the identified contaminant hotspot and analyzed for total lead. Soil boring locations are indicated as B-02, B-03, B-04 on Figure 2. Soil borings were installed by first coring through the concrete floor of the facility building. A limited access drill rig was used to advance hollow stem augers through the cored holes. The gray soil layer identified the 1993 excavation activities in the area surrounding the former dry-well was not observed in any sample from the soil.

Samples were obtained from the appropriate sampling depths using a decontaminated split-spoon soil sampler. The samples were collected by placing the soil directly from a 2-inch split-spoon into an 8-ounce glass jar using a pre-cleaned stainless steel spoon. The samples were transported to Philip's Laboratory in Renton, Washington, and analyzed for total lead concentrations using EPA Method 6010.

6.3 Characterization of Grass Lot on East Side of Wagstaff Property

Three soil samples were collected on October 14 1997 to assess total lead concentrations in the grass lot located on the eastern portion of the Wagstaff property (Figure 2). One sample (B-05) was collected from the area adjacent to the discharge fan; another sample (B-06) was collected along the eastern fence line near the area sampled in 1986; the third sample (B-07) was collected approximately 5 ft east of the former dry-well. Each of the three samples were collected from undisturbed surface soils at depths of approximately 1 to 2 inches bgs. No evidence of previous excavation or other land reworking activities were observed in the sampling locations.

All samples were collected using pre-cleaned stainless steel sampling spoons and placed in laboratory-supplied 8-ounce glass sample containers. The containers were labeled with the sample location, date, time and sample ID number and placed in a cooler packed with ice, then transported under chain-of-custody to the laboratory for analysis. The samples were analyzed for total lead concentrations using EPA method 6010 at the Philip Renton Laboratory.

6.4 Removal of Stabilized Soil Surrounding Former Dry-well

The DEQ determined that a site risk assessment study of the potential impacts from the stabilized soil buried in the area surrounding the former dry-well would be required before an NFA determination would be issued, if the stabilized material was to remain on-site. As a result, Wagstaff decided to remove the treated soil from the site.

The treated soil was overlain by a layer of clean overburden to a depth of approximately four feet bgs. Over a period of several days in October 1997, Philip removed the overburden and stockpiled it on site. The previously treated soil was located in an area measuring approximately 18 feet by 20 feet and extending from approximately four feet bgs to approximately 20 feet bgs.

In addition to the previously treated soil, a gray colored soil layer, corresponding to the gray layer identified during the 1993 excavation activities, was encountered in the southwest corner of the excavation pit (Figure 3). The gray layer was observed extending from a depth of approximately 8 feet bgs to approximately 18 feet bgs. The gray layer appears to emanate from the location of the former dry well near the center of the excavation towards the southwest corner of the excavation and the facility building. Along the west wall of the excavation, the width of the gray layer varied from approximately 2 feet at 8 feet bgs to approximately 12 feet at 18 feet bgs.

The vertical extent of the gray layer in the west wall could not be determined due to the proximity of the excavation pit to the foundation of the building and the potential for impacting the structural integrity of the building. However, confirmation samples collected from the bottom of the excavation, approximately 24 ft bgs contained total lead concentrations of 33 mg/kg (Table 2), indicating that the vertical extent of lead-impacted soil did not extend below this depth.

The gray layer was also present, although to a lesser extent, at approximately 14 ft bgs along the south wall, near the southwestern corner of the excavation. The lateral extent of the gray layer along the south wall could not be fully delineated due to the presence of an asphalt driveway, however confirmation samples collected from 16 ft bgs along the south wall indicated total lead concentrations of approximately 13 mg/kg indicating that lead-impacted soils remaining in this area did not extent below 16 ft bgs.

Following excavation of the previously stabilized material, six confirmation samples were collected from the sidewalls and bottom of the excavation and analyzed for total lead concentrations at North Creek Analytical. The area of impacted soil was over-excavated to ensure complete removal of the previously treated soil with the final excavation measuring approximately 26 feet by 28 feet with a depth of 20 feet. The liner and approximately 350 tons of impacted or previously treated soil were excavated and transported off-site for disposal at the Waste Management Facility in Columbia Ridge. Receipts for disposal of the treated soils and other associated wastes are provided in Appendix A.

7.0 ANALYTICAL RESULTS

7.1 TPH Concentrations Beneath Sump 1

The vertical distribution of petroleum concentrations evident from the analytical data collected below Sump #1 indicates that there is decreasing concentration with depth. The data indicates that petroleum concentrations are present at 13,100 mg/kg at 9 feet bgs, 334 mg/kg at 12 feet bgs and below detectable limits at 15 feet bgs. Only one PAH, phenanthrene, was detected (22 μ g/kg). It was detected from the sample collected at 12 feet bgs, B-01-12. No other PAH compound was detected from any other sample. Soil pH ranged from 3.56 to 5.39. Analytical results from the borings and soil samples are presented as Table 1. Analytical data is provided in Appendix B.

The volume of residual impacted soil remaining beneath Sump #1 (ν) can be estimated by calculating the volume of a theoretical cylinder beneath Sump 1 based on the results of the field investigation and analytical results from boring (B-01) using the following equation.

$$v = \pi r^2 h$$

where r, the lateral extent of impacted soil surrounding Sump #1 is assumed to fall within a 3 ft radius of the sump. TPH-impacted soil beneath the sump was observed extending to approximately 15 ft bgs. The upper 5 ft of this soil was excavated from beneath the sump during 1993. Therefore h, the vertical extent of residual impacted soil remaining beneath Sump #1 is assumed to be 10 ft. Solving this equation for ν yields an estimated 283 ft³ (10.5 yd³) of residual impacted soil remaining beneath the facility building in the vicinity of Sump #1.

7.2 Lead Concentration, West Wall of Building I

Total lead concentration from the borings collected inside Building I, adjacent to the former dry-well location ranged from 5.51 mg/kg in sample B-03-10 to 8.37 mg/kg in sample B-04-5, (Table 1). None of the samples exceeded the clean-up level of 200 mg/kg. There is no indication that elevated lead concentrations extend any significant distance beneath the facility in the vicinity of the former dry-well.

7.3 Lead Concentrations in the Grassy Lot on East Side of Property

Analytical data from the surface soils collected from the grassy lot adjacent to the facility indicate lead concentrations at 139 mg/kg in sample B-05-S, 22.2 mg/kg in sample B-06-S and 27.5 mg/kg in sample B-07-S, (Figure 2). No analytical results exceeded the clean-up level of 200 mg/kg, (Table 1).

7.4 Excavation Activities in the Area Surrounding the Former Dry-Well

The analytical results of total lead analyses in confirmation samples collected following excavation of soil from the area surrounding the former dry-well the soil excavation activities are provided in Table 2. Laboratory reporting sheets are provided in Appendix B. The results of the confirmation analyses from samples B-01 and B-07 indicated the presence of elevated concentrations of total lead along the west wall of the excavations (Figure 3). Total lead concentrations of 383 mg/kg were detected in the 10 ft bgs sample from B-03. Total lead concentrations of 3,750 mg/kg were detected in the 19 ft bgs sample from B-01. Following receipt of the analytical results from B-01, soil was excavated to a depth of 24 ft bgs and resampled (B-08) to evaluate whether all soil above the 200 mg/kg cleanup criteria had been removed. As shown in Table 2, total lead concentrations in B-08 (24 ft bgs) were approximately 33 mg/kg. Because total lead concentrations were below 40 mg/kg in each of the confirmation samples collected from the bottom of the excavation, none of the samples were analyzed for soluble lead (TCLP) concentrations.

As stated above, due to the proximity of the excavation pit to the foundation of the building and the potential for impacting the structural integrity of the building, some residual lead-impacted soil remains onsite in the area adjacent to the building. However, the gray soil layer observed during excavation activities was not observed in any samples collected from the borings B-02 through B-04, installed inside the facility building adjacent to the area of excavation In addition, the total lead concentration observed in borings B-02 through B-04 were all below 10 mg/kg. These results indicate that residual lead-impacted soil does not extend beneath the facility building.

The volume of residual impacted soil can be estimated based on the observations made during the field activities and the analytical results from the confirmation samples. Based on the results of the field investigation the average lateral extent of the gray layer in the west wall is assumed to be 10 ft. The vertical extent of residual impacted soil is assumed to be 20 ft. The extent of residual lead-impacted soil is estimated to be less than 3 ft from the sidewall of the excavation. Multiplication of these estimated dimensions yields an approximate volume of 600 ft³ (22 yd³) of lead-impacted residual impacted soil adjacent to the building.

8.0 CONCLUSIONS AND RECOMMENDATIONS

The results of this investigation indicate the presence of petroleum compounds at concentrations of 13,100 mg/kg at 9 feet bgs directly beneath Sump # 1. However, the concentrations are below analytical detection limits at 15 feet bgs. Groundwater in the vicinity of the site is approximately 55 feet bgs, more than 40 feet below the impacted soil. The sump is no longer in use. The impacted soil is beneath Building I and the ground surface surrounding Building I is covered by asphalt pavement. As a result, the area of impacted soil is not subject to infiltration by rainfall. Therefore, it is unlikely that the petroleum compounds beneath Sump #1 will reach groundwater or migrate off-site. Excavation of the impacted soil beneath the sump is not recommended.

Analytical data from soil samples collected along the eastern wall of the facility building indicate that the total lead concentrations were below the cleanup criteria of 200 mg/kg. The highest concentration of total lead was observed in the sample from 5 feet bgs in boring B-04 (8.37 mg/kg).

Analytical data from the samples collected from the grassy lot indicate that total lead concentrations were below the cleanup action level.

Soil treated during previous site activities was excavated from the area surrounding the former dry-well located adjacent to the east wall of the facility building. Elevated lead concentrations were observed in the confirmation samples collected from the west wall of the excavation pit, extending toward the facility building. This soil cannot be removed without jeopardizing the structural integrity of the building. All other soil samples collected from the excavation pit indicate levels below the cleanup criteria. The analytical results of confirmation sampling indicates that the vertical extent of lead-impacted soil remaining in the area adjacent to the west wall of the facility building is less than 24 ft bgs. Groundwater in the vicinity is estimated to occur at 55 ft bgs, approximately 30 ft below the vertical extent of impacted soil. As a result, it is considered unlikely that the residual impacted soil remaining on site would act as a source of groundwater degradation. Excavation of this soil is not recommended.

Based on the results of the recent investigation and associated remediation activities, Philip proposes that the DEQ grant a No Further Action determination for this site.

Table 1

Analytical Data from Soil Borings and Surface Samples

		Analytical Results				
Sample	Depth	Total Lead	PAHs	TPH 418.1	pН	
Number	(bgs)	(mg/kg)	(μg/kg)	(mg/kg)	3.53	
B-01-9	9	-	ND	13,100		
B-01-12	12		Phenanthrene 22	334	3.39	
B-01-15	15	-	ND	ND	3.56	
B-02-2	2	7.23	-	_	-	
B-02-5	5	7.14	-	-	-	
B-02-8	8	7.09	•	-	-	
B-02-10	10	6.73	-	•	-	
B-902-2	2	7.74 7.67 8.15	-	-	- - -	
B-03-2	2		-	•		
B-03-5	5					-
B-03-8	8	6.37	-	-		
B-03-10	10	5.51	•	-	-	
B-04-2	2	6.36		-	-	
B-04-5	5	8.37	-	-	-	
B-04-8	8	6.14	-	**	-	
B-04-10	10	6.74	-	-	-	
B-05-S	Surface	1.39	-	-	-	
B-06-S	Surface	22.2	-	-	-	
B-07-S	-07-S Surface 27.5		-	-	-	

ND = not detected


⁻ indicates not analyzed for


Table 2


Analytical Data of Confirmation Samples of Excavation Pit

Sample Number	Location	Depth	Total Lead (mg/kg)		
1	West center	19	3,750		
2	South center wall	12	67.1		
3	West wall	10	383		
4	East center bottom	18	ND		
5	East wall	8	17.2		
6	North wall	10	ND		
7	South wall	16	13.3		
Bottom	West center bottom	24	33.6		
Stockpile			99.6		

ND = not detected

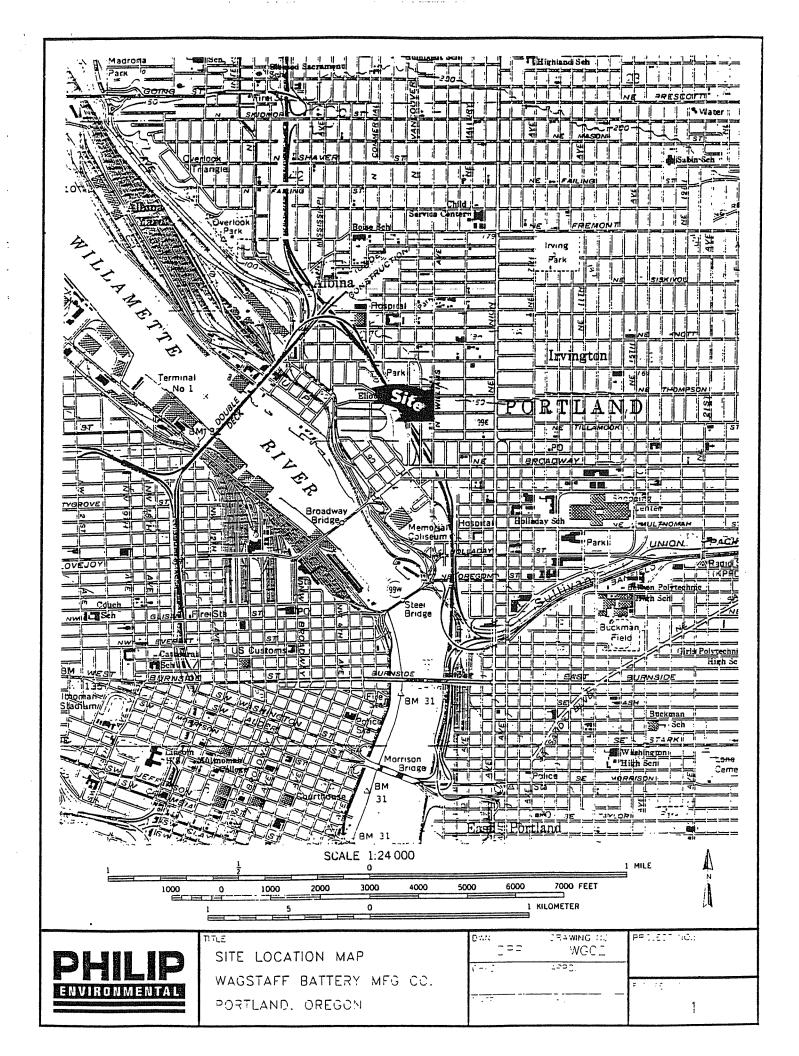

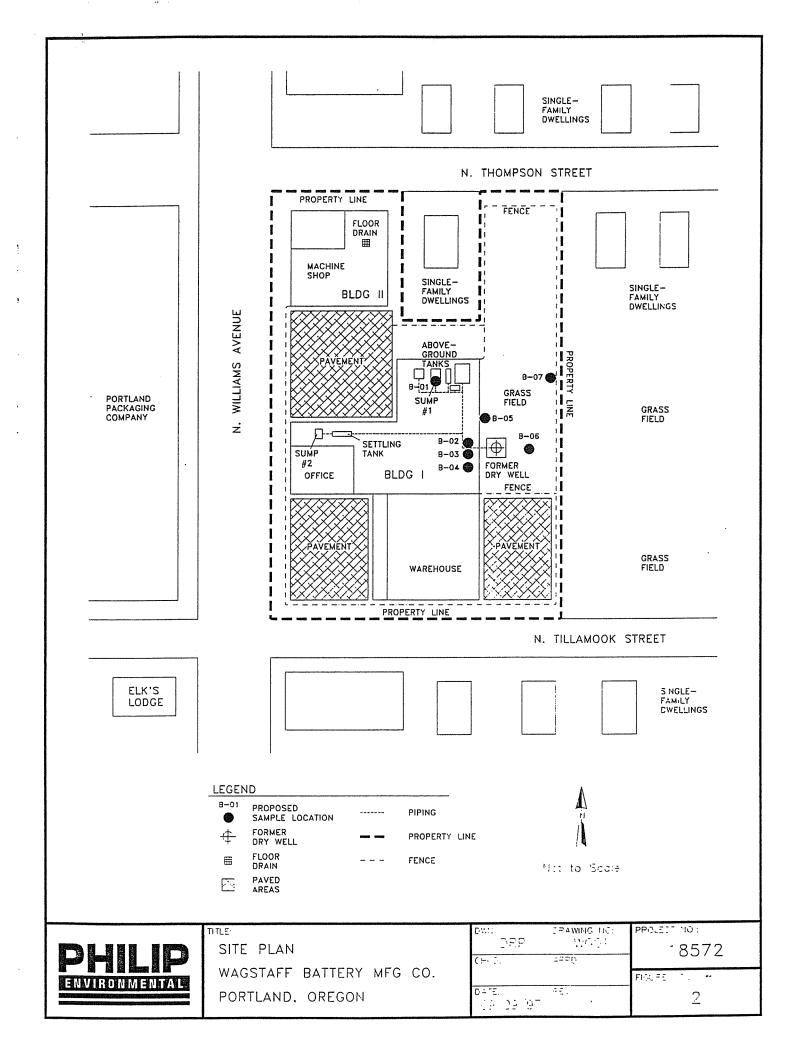

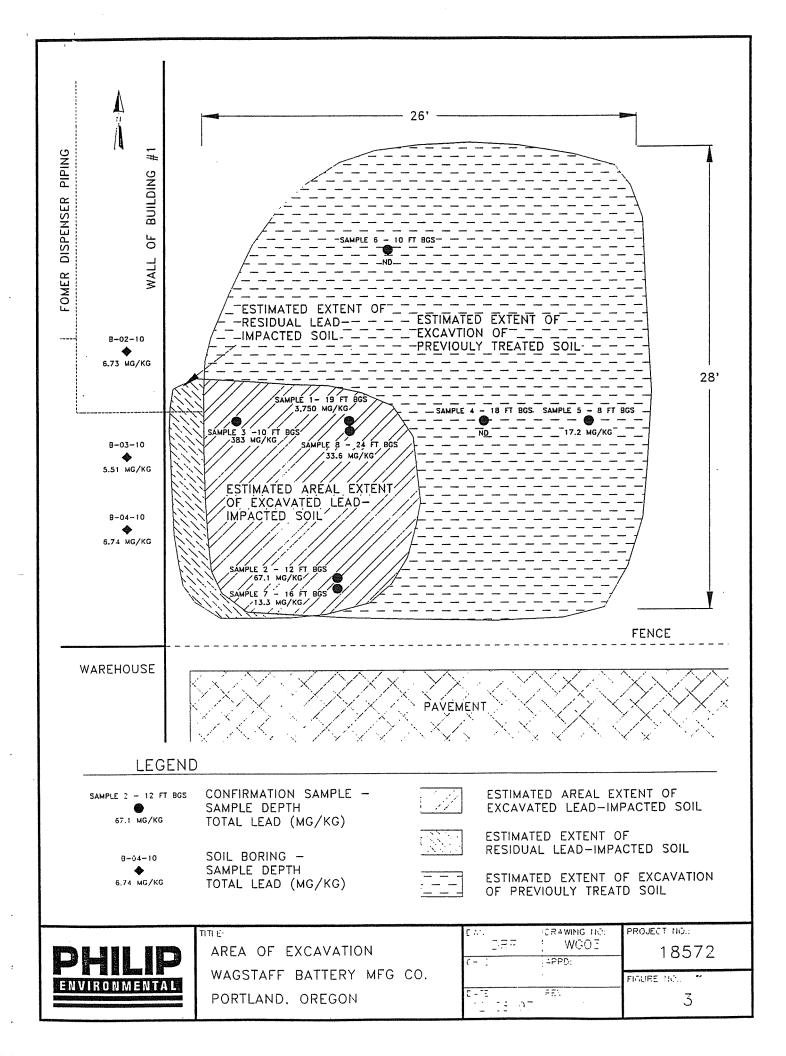

APPENDIX A WASTE DISPOSAL RECEIPTS

RECYCLE AMERICA - TROUTDALE Customer Activity Report 10/24/1997 thru 10/31/1997 Date: 12/10/1997

Page: 1

Customer 1108894 OREGON WASTE SYSTEMS, INC

	Category SOI	SOIL						
	DATE	TRUCK	CICKET	GROSS	TARE	NET		
	10/24/1997	505	3104	42520	24860	17660		
	10/24/1997	505	3105	49680	24860	24820		
	10/24/1997	501	3110	46560	24480	22080		
•	10/24/1997	501	3111	49740	24480	25260		
	10/24/1997	501	3120	54080	24480	29600		
	10/24/1997	502	3128	53760	24780	28980		
	10/24/1997	502	3129	53540	24780	28760		
	10/24/1997	89	3132	64680	30960	33720		
	10/24/1997	89	3133	65280	30960	34320		
	10/24/1997	89	3134	67600	30960	36640		
	10/24/1997	502	3135	54300	24780	29520		
	10/24/1997	89	3136	67260	30960	36300		
	10/24/1997	502	3137	58800	24780	34020		
	10/24/1997	188	3138	46940	23540	23400	•	
	10/24/1997	188	3139	46880	23540	23340		
	10/24/1997	89	3145	58320	30780	27540		
	10/24/1997	8.9	3170	66340	30960	35380		
	10/24/1997	89	4459	49860	30960	18900		
	10/27/1997	400	3151	53540	26000	27540		
	10/27/1997	89	3156	62760	31000	31760		
	10/27/1997	89	3161	64640	31000	33640		
	10/27/1997	89	3162	62420	31000	31420		
	10/27/1997	400	3164	52160	26000	26160	,	
	10/27/1997	400	3169	54760	26000	28760		
	10/27/1997	89	3174	65400	31000	34400		
	Category Totals							
	25	Total:		1411820	687900	723920		
	Marine 3 Marinessia	. . .		GROSS	TARE	NET		
	Type A Materia							
	Type B Materia							
	Type C Materia			1411820	687900	723920		
	Type D Materia							
	Type E Materia			•	•			
	Type F Materia			1422000				
	TOTAL ORE	: 25		1411820	687900	723920		

TIME IN: 11:17 TIME OUT: 11:17 TICKET: 3104 DATE: 10/24/1997

TRUCK: 505

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO CUSTOMER: ORE

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

UKEBUN WE

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 42520 KB Weigh-in TARE LBS: 24860 KB Weigh-out

TONS: RATE: 8.83

SUB TOTAL:

NET LBS: 17660 8.83 TON TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:18 TIME OUT: 11:18 TICKET: DATE: 10/24/1997

TRAILER: TRUCK: 505 CARRIER: NO

PROFILE: 489528 A-NOBLE GENERAL CONTRACTORS

MANIFEST:

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 49680 KB Weigh-in 24860 KB Weigh-out TARE LBS:

TONS: RATE:

12.41

NET LBS: 24820 12.41 TON

SUB TOTAL: TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 12:00 TIME OUT: 12:01 TICKET: 3110

DATE: 10/24/1997

TRUCK: 501

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 46560 KB Weigh-in

TARE LBS: 24480 KB Weigh-out

NET LBS: 22080 11.04 TON

TONS: 11.04 RATE:

SUB TOTAL: TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 12:02 TIME OUT: 12:02

TICKET: 3111

DATE: 10/24/1997

TRUCK: 501

TRAILER:

PROFILE: 489528 MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC NON ROUTED TRUCK

ROUTE: NA

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 49740 KB Weigh-in

TONS: RATE:

12.63

TARE LBS: 24480 KB Weigh-out

SUB TOTAL:

NET LBS: 25260 12.63 TON

TAX: TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 12:52 TIME OUT: 12:52 TICKET: 3120

DATE: 10/24/1997

TRUCK: 501

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

NON ROUTED TRUCK

ROUTE: NA

SOIL

CATEGORY: SOI

3016

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 54080 KB Weigh-in TARE LBS: 24480 KB Weigh-out

RATE:

TONS:

14.80

SUB TOTAL:

NET LBS: 29600

500 14.80 TON

TAX:
TOTAL AMOUNT:

WEIGHMASTER SIGNATURE

DRIVER SIGNATURE

TIME IN: 14:22 TIME OUT: 14:23 TICKET: 3128

DATE: 10/24/1997

TRUCK: 502

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS:

53760 KB Weigh-in

TONS: RATE: 14.49

TARE LBS:

24780 KB Weigh-out

SUB TOTAL:

NET LBS:

28980 14.

14.49 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

WASTE MANAGEMENT/RECYCLE AMERICA 869 NW EASTWIND DRIVE TROUTDALE, OR 97060

(503)667-5264

TIME IN: 14:23 TIME OUT: 14:23 TICKET: 3129

DATE: 10/24/1997

TRUCK: 502

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 53540 KB Weigh-in

TARE LBS: 24780 KB Weigh-out

NET LBS: 28760 14.38 TON TONS: 14.38 RATE:

SUB TOTAL: TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 14:55 TIME OUT: 14:57 TICKET: 3132 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

TONS:

16.86

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 64680 KB Weigh-in TARE LBS: 30960 KB Weigh-out

RATE: SUB TOTAL:

NET LBS: 33720 16.86 TON

TAX:

DRIVER SIGNATURE

WASTE MANAGEMENT/RECYCLE AMERICA 869 NW EASTWIND DRIVE TROUTDALE, OR 97060

(503)667-5264

TIME IN: 15:02 TIME OUT: 15:02 TICKET: 3133

DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

17.16

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC NON ROUTED TRUCK

ROUTE: NA

SOIL

CATEGORY: SOI

PORTLAND

ORIGIN: PLND

O1/ 1 C/114D

DESTINATION:

BOL:

SEAL:

COMMENT:

DRIVER SIGNATURE

WEIGHMASTER SIGNATURE

TOTAL AMOUNT:

TIME IN: 15:03 TIME OUT: 15:03 TICKET: 3134 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS:

67600 KB Weigh-in

TONS:

18.32

TARE LBS:

30960 KB Weigh-out

RATE: SUB TOTAL:

TAX:

NET LBS: 36640 18.32 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

WASTE MANAGEMENT/RECYCLE AMERICA 869 NW EASTWIND DRIVE TROUTDALE, OR 97060

(503)667-5264

TIME IN: 15:18 TIME OUT: 15:18 TICKET: 3135 DATE: 10/24/1997

MANIFEST:

14.76

TRUCK: 502 TRAILER:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

PROFILE: 489528

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

)I SOIL ND PORTLAND

ORIGIN: PLND DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 54300 KB Weigh-in TARE LBS: 24780 KB Weigh-out TONS: RATE:

NET LBS: 29520 14.76 TON

SUB TOTAL:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 15:21 TIME OUT: 15:21 TICKET: 3136 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO CUSTOMER: ORE A-NOBLE GENERAL CONTRACTORS

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 67260 KB Weigh-in TARE LBS: 30960 KB Weigh-out TONS: RATE:

18.15

SUB TOTAL:

NET LBS:

36300

18.15 TON

TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 15:39 TIME OUT: 15:39 TICKET: 3137 DATE: 10/24/1997

TRUCK: 502

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO CUSTOMER: ORE

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 58800 KB Weigh-in TARE LBS: 24780 KB Weigh-out TONS: RATE: 17.01

RE LBS: 24780 RB Weigh-out

SUB TOTAL:

NET LBS: 34020 17.01 TON

TAX:
TOTAL AMOUNT:

DRIVER SIGNATURE WEIGHMASTER SIGNATURE

TIME IN: 15:42 TIME OUT: 15:42 TICKET: 3138 DATE: 10/24/1997

TRUCK: 188

TRAILER:

PROFILE: 489528

MANIFEST:

TONS:

11.70

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS:

46940 KB Weigh-in

TARE LBS:

23540 KB Weigh-out

RATE:

SUB TOTAL: TAX:

NET LBS: 23400

11.70 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 15:43 TIME OUT: 15:43 TICKET: 3139 DATE: 10/24/1997

TRUCK: 188

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

46880 KB Weigh-in GROSS LBS: TARE LBS: 23540 KB Weigh-out TONS: RATE:

11.67

SUB TOTAL:

NET LBS: 23340 11.67 TON

TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 16:30 TIME OUT: 16:30 TICKET: 3145 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 58320 KB Weigh-in

TONS: RATE:

13.77

TARE LBS:

30780 KB Weigh-out

SUB TOTAL:

TAX:

NET LBS:

27540 13.77 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:39 TIME OUT: 11:39 TICKET: 3170 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 66340 KB Weigh-in TARE LBS: 30960 KB Weigh-out TONS: 17.69

SUB TOTAL: TAX:

RATE:

NET LBS: 35380 17.69 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 09:19 TIME OUT: 09:19 TICKET: 3151 DATE: 10/27/1997

TRUCK: 400

TRAILER:

PROFILE: 489528

MANIFEST:

13.77

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

NON ROUTED TRUCK

ROUTE: NA CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 53540 KB Weigh-in TARE LBS: 26000 KB Weigh-out TONS: RATE:

NET LBS: 27540 13.77 TON

SUB TOTAL: TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 15:33 TIME OUT: 15:28 TICKET: 4459 DATE: 10/24/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 49860 KB Weigh-in TARE LBS: 30960 KB Weigh-out TONS: 9.45 RATE:

NET LBS: 18900

9.45 TON

TAX:
TOTAL AMOUNT:

SUB TOTAL:

DRIVER SIGNATURE WEIGHMASTER SIGNATURE

TIME IN: 09:40 TIME OUT: 09:41 TICKET: 3156 DATE: 10/27/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

NON ROUTED TRUCK

ROUTE: NA

SOIL

CATEGORY: SOI

PORTLAND

ORIGIN: PLND

DESTINATION: BOL: 75318

SEAL:

COMMENT:

GROSS LBS: 62760 KB Weigh-in

RATE:

TONS:

15.88

TARE LBS: 31000 KB Weigh-out

SUB TOTAL: TAX:

NET LBS:

31760

15.88 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:02 TIME OUT: 11:02 TICKET: 3161 DATE: 10/27/1997

TRAILER: TRUCK: 89

PROFILE: 489528 MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

NON ROUTED TRUCK

ROUTE: NA

SOIL

CATEGORY: SOI

PORTLAND

ORIGIN: PLND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 64640 KB Weigh-in TARE LBS: 31000 KB Weigh-out TONS: 16.82 RATE:

SUB TOTAL: TAX:

NET LBS: 33640 16.82 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:05 TIME OUT: 11:05 TICKET: 3162 DATE: 10/27/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS

CUSTOMER: ORE

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 62420 KB Weigh-in TARE LBS: 31000 KB Weigh-out TONS: 15.71 RATE:

SUB TOTAL: TAX:

NET LBS: 31420 15.71 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:14 TIME OUT: 11:15 TICKET: 3164 DATE: 10/27/1997

TRUCK: 400

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 52160 KB Weigh-in 26000 KB Weigh-out TARE LBS:

TONS: 13.08 RATE:

SUB TOTAL:

TAX:

NET LBS: 26160 13.08 TON

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 11:34 TIME OUT: 11:34 TICKET:

DATE: 10/27/1997

TRUCK: 400

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO.

A-NOBLE GENERAL CONTRACTORS OREGON WASTE SYSTEMS, INC

CUSTOMER: ORE

NON ROUTED TRUCK

ROUTE: NA

SOIL

CATEGORY: SOI

PORTLAND

ORIGIN: PLND

DESTINATION:

BOL:

SEAL:

COMMENT:

KB Weigh-in GROSS LBS: 54760 KB Weigh-out TARE LBS: 26000

14.38 TONS: RATE:

14.38 TON NET LBS: 28760

SUB TOTAL: TAX:

TOTAL AMOUNT:

DRIVER SIGNATURE

TIME IN: 12:24 TIME OUT: 12:24 TICKET: 3174

DATE: 10/27/1997

TRUCK: 89

TRAILER:

PROFILE: 489528

MANIFEST:

CARRIER: NO CUSTOMER: ORE A-NOBLE GENERAL CONTRACTORS

OREGON WASTE SYSTEMS, INC

ROUTE: NA

NON ROUTED TRUCK

CATEGORY: SOI

SOIL

ORIGIN: PLND

PORTLAND

DESTINATION:

BOL:

SEAL:

COMMENT:

GROSS LBS: 65400 KB Weigh-in

TARE LBS: 31000 KB Weigh-out

NET LBS: 34400 17.20 TON

TONS: 17.20 RATE:

SUB TOTAL:

TOTAL AMOUNT:

DRIVER SIGNATURE



OREGON WASTE SYSTEMS, INC. COLUMBIA RIDGE LANDFILL & RECYCLING CENTER 18177 CEDAR SPRING LANE ARLINGTON, OREGON 97812

PHONE: 541/454-2030

CUSTOMER INFORMATION:

Philip Services

7117 NE 47th Avenue Vancouver, Wa. 98668

Attn: David Jacobs

INVOICE #:

1204-Wagstaff

DATE:

12/04/97

PROFILE #

489528

LOCATION:

Portland Ore.

WASTE TYPE: Treated Soil Cont.

with Lead

SUMMARY OF CHARGES

TONS RECEIVED IN OCTOBER

335.46

TONS RECEIVED IN NOVEMBER

26.74

TOTAL TONS RECEIVED

362.2

DISPOSAL/TRANS/TAXES/FEES

\$55.50/TON

\$20,102.10

TOTAL AMOUNT DUE

\$20,102.10

SEND REMITTANCE TO:

OREGON WASTE SYSTEMS, INC.

P.O. BOX 55037

PORTLAND, OR 97238-5037

INVOICE #:


1204-Wagstaff

AMOUNT DUE:

\$20,102.10

WE THANK YOU FOR YOUR BUSINESS AND PROMPT PAYMENT!

exp.date 10/27/97



18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 268263

05 NOU 97 W 420.639 93160 LB 1234 wastan TIME 07:39 AM GROSS TRAILER/CONTAINER NUMBER: CUSTOMER INVOICE NO.: CUSTOMER NAME: PROFILE NUMBER: TRUCK NUMBER: GROSS WEIGHT: SEAL . NUMBER: LOAD DATE: DATE:/TIME:

41680 LB 53420 LB M TARE WGT.-TRAILER/CONTAINER: TARE WEIGHT-TRACTOR: NET WEIGHT:

Gescl Contamos Lecal ORIGIN: OP 507 TRAIN ID: N-120GK QCS WASTE TYPE:_ GATEHOUSE: DRIVER:

EM DG KIENLAPOLCO 1 126 B. Leafley See Nothi **DISPOSAL:** REMARKS:



A Waste Management Company

 $N_{\ddot{0}}$

Departure Time:

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 237654

DATE:/TIME:	Cct 2797 5:09 PM	5011
LOAD DATE: CUSTOMER NAME:	1 Wagstaff	32 (tons)
PROFILE NUMBER:	489528	tructions:
TRUCK NUMBER:	400	
TRAILER/CONTAINER NUMBER:	2017	Tource Telphone #1 (VOO) 12 (222)
SEAL NUMBER:	R.C.)	ponce Telphone #: (800) 424-9300
CUSTOMER INVOICE NO.:	Bof L	ors Representative)
, GROSS WEIGHT:	92580	10/77
TARE WEIGHT-TRACTOR:		Date
TARE WGT:-TRAILER/CONTAINE	R: 37560	me & Address:
NET WEIGHT	55620	
NET WEIGHT:	=======================================	dfill & Recycling Facility Lane
	\ \ \	12
GATEHOUSE: DRIVER: SEE TOKET #	1012 LoZ	54-2030
TRAIN ID:	ORIGIN:	
WASTE TYPE: SUIT (INT L		
DISPOSAL: ————————————————————————————————————	Beneficial we	(Upon pick-up)
REMARKS:		accessories are in good condition
materal would		door ratchets are secured tightly is empty and clean
gridalia as road t	ed and till materal	is empty and clean
·		
debris on the outside of the container/truels		s and tarp bows have been removed transporter is to clean and remove all
debris on the outside of the container/truck, replace	ce the roof bows, and secure the tarp p	prior to leaving the job site
Driver Name (Please Print)	C'	10-27-97
Remarks:	Signature	Date



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

OT#	967653 (541) 454-2030		Departure Time:
145	267653	•	489528
	DATE:/TIME:	12797 1:36pm	(21)
	LOAD DATE:		<u> </u>
	CUSTOMER NAME: LUMU/ L	Nagstaft	(tons)
	PROFILE NUMBER:	489528	structions:
	TRUCK NUMBER:	500	
	TRAILER/CONTAINER NUMBER:	<u>T500</u>	
	SEAL NUMBER:		ponce Telphone #: (800) 424-9300
	CUSTOMER INVOICE NO .:	54150	
	,		ors Representative)
	GROSS WEIGHT:	162600	W/7/19
	TARE WEIGHT-TRACTOR:	771-70	Date
	TARE WGTTRAILER/CONTAINER:	37620	me & Address:
	NET WEIGHT.	64980	
	NET WEIGHT:		dfill & Recycling Facility Lane
		\(\)	12
	GATEHOUSE:	1262	54-2030
	DRIVER: See MCLL+ # COL		1 2000
		IGIN:	
	WASTE TYPE: SOIL CONT WILL DISPOSAL: GM DC BE	neticial ise	(Upon pick-up)
	PEMARKS.	·	accessories are in good condition
	material is being u	scd in asbestus	door ratchets are secured tightly
	grid and as road b	ocal and fill	is empty and clean
	increnal		
			s and tarp bows have been removed
dehris on	the outside of the container/truck, replace the	prior to loading. After loading, t	the transporter is to clean and remove all
11.	// ///	e root dows, and seeme the tarp	prior to leaving the job site.
Driver Na	Ma (Place Print)	- Music /Lie	ne 10-2747
	me (riease rimit)	Signature	Date
Remarks:			

 $N_{ar{0}}$

54150



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 237652

180	207002			4895) f-
	DATE:/TIME:	Oct 2797	1:33pm	Out Cil	
	LOAD DATE:				
	CUSTOMER NAME:UM(1/ Wagst	aff		(tons)
	PROFILE NUMBER:	489		nstructions:	
	TRUCK NUMBER:	500	j		
	TRAILER/CONTAINER NUMBER:	504	T		
	SEAL NUMBER:		,	esponce Telphone #: (800)	424-9300
	CUSTOMER INVOICE NO .:	5414	17	actors Representative)	
				actors representative)	10/07/
	GROSS WEIGHT:	10281	00		Date
	TARE WEIGHT-TRACTOR:	3791	^		
	TARE WGTTRAILER/CONTAINER:			Name & Address:	
	NET WEIGHT:	<u></u> 649		andfill & Recycling Facility	
,				ngs Lane	•
	GATEHOUSE:	シン			
	DRIVER: See ticket 0042		P	3) 454-2030	
		ORIGIN:			
1		luad		PARAMETER CONTINUES CONTIN	
	DISPOSAL: <u>GM DC</u>	Beneficia	Elie ji	ion (Upon pick-up)	
	REMARKS: <u>material is</u>	being use		and accessories are in good co	
Ĺ	rastestus grid area	as road	ra !	and door ratchets are secured iner is empty and clean	tightly
-	and fill material			mer is empty and clean	
-					
				Manufacture and a second a second and a second a second and a second a	
leaving	the entire consumer		· ·	tarps and tarp bows have beg the transporter is to clean a	
	the entire container/unck nee of cost of the outside of the container/truck, rep				
Ger	eld Martin	_	Gereld	Martin	10-27-91
	Jame (Please Print)	Sign	nature		Date
Remarks	: :				

 $M\ddot{o}$

Departure Time:

54147



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 237651

Driver Name (Please Print)

Remarks:

DATE:/TIME: LOAD DATE: CUSTOMER NAME: LOMO/ PROFILE NUMBER: TRUCK NUMBER: TRAILER/CONTAINER NUMBER:	Wagstaff 489528 506 506 T	Tructions:
SEAL NUMBER: CUSTOMER INVOICE NO.:	54148	ponce Telphone #: (800) 424-9300
GROSS WEIGHT: TARE WEIGHT-TRACTOR: TARE WGTTRAILER/CONTAINER:	100480 37760	brs Representative) Date
NET WEIGHT:	<u> </u>	e & Address: fill & Recycling Facility Lane
======================================	IGIN:	2 4-2030
maste Type: Soir Corri Winder Disposal: GM De Be REMARKS: Material is being in bod and fill material corrid area	red as road	Jpon pick-up) cessories are in good condition oor ratchets are secured tightly s empty and clean
the entire container/truck free of obstructions p	rior to looking. A feet looking	arps and tarp bows have been removed

 $M_{\tilde{0}}$

Departure Time:

54148

debris on the outside of the container/truck, replace the roof bows, and secure the tarp prior to leaving the job site.



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267650

TAA	207000		489528
	DATE:/TIME: LOAD DATE:	Oct 2797 11:42am	$\frac{S_{01}}{77.18}$
	CUSTOMER NAME: WM	10/Wagstaff 489528	structions: (tons)
	PROFILE NUMBER: TRUCK NUMBER:	502	of detions.
	TRAILER/CONTAINER NUMBER: SEAL NUMBER:	502 ⁻ T	sponce Telphone #: (800) 424-9300
	CUSTOMER INVOICE NO.:	54145	tors Representative)
•	GROSS WEIGHT: TARE WEIGHT-TRACTOR:	103720	D-27-57 Date
	TARE WGTTRAILER/CONTAINER:	37520	ame & Address:
	NET WEIGHT:	<u> </u>	ndfill & Recycling Facility s Lane 812
	GATEHOUSE: DRIVER: See ticket # 20	· 004259	454-2030
	TRAIN ID:	Head Beneficial USE Used in asbestos	n (Upon pick-up) d accessories are in good condition d door ratchets are secured tightly er is empty and clean
	he outside of the container/truck, replac		rps and tarp bows have been removed he transporter is to clean and remove all prior to leaving the job sitc.
Driver Nam	ne (Please Print)	Signature	10-27-97
Remarks:		7	240

 $N\bar{0}$

Departure Time:

54145



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 237649

Remarks:

DATE:/TIME:	oct 2797 11:39 am	Soil
LOAD DATE:		33-5/ (tons)
CUSTOMER NAME: WMO	/ Wagstaff	(tons)
PROFILE NUMBER:	489528	nstructions:
TRUCK NUMBER:	505	
TRAILER/CONTAINER NUMBER:	505T	
SEAL NUMBER:		esponce Telphone #: (800) 424-9300
CUSTOMER INVOICE NO .:	54146	ctor Representative)
,		1 10/02/
GROSS WEIGHT:	164520	Com Party
TARE WEIGHT-TRACTOR:		Date
TARE WGTTRAILER/CONTAINER:	37620	Vame & Address:
NET WEIGHT:		andfill & Recycling Facility
		ngs Lane 97812
GATEHOUSE:	JV	-
DRIVER: See HCKet #) 454-2030
•	ORIGIN:	
WASTE TYPE: Soil cont w	1 0 (cd	
DISPOSAL: <u>-CM De</u> F		ion (Upon pick-up)
REMARKS:		and accessories are in good condition
moteral is being u	こうししょ しょうししくりしつ ニュー・	and door ratchets are secured tightly
and area as road b	ed and fill	iner is empty and clean
material		
		tarps and tarp bows have been removed
leaving the chine comming the chine		g, the transporter is to clean and remove all
debris on the outside of the container/truck, rep	place the roof bows, and secure the ta	rp prior to leaving the job site.
Linda Hadrows	- Aluda	Intrev 10-27-97
Driver Name (Please Print)	Signature /	Date

 $Mar{o}$

Departure Time:

54146



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267648

DATE:/TIME:	((1-	2497 3 30 p	im	\sim	
LOAD DATE:			-	27	
CUSTOMER NAME:	WHU	waystatt	_		(to
PROFILE NUMBER:	_	489528	struc	tions:	
TRUCK NUMBER:	_	510	-		
TRAILER/CONTAINER NUME	BER:	T510	-		
SEAL NUMBER:	_		spon	ce Telphone #: ((800) 424-9300
CUSTOMER INVOICE NO .:	-	54153	- to	Representative)	
,	<u></u>		- tors	Kepresentative)	,
GROSS WEIGHT:	_	103000	_ 		1c/24
TARE WEIGHT-TRACTOR:		38680			Date
TARE WGTTRAILER/CONT.	AINER:		- ame	& Address:	
NET WEIGHT:		64380	1.00		*1*.
NET WEIGHT.				l & Recycling Fa	
			812		
GATEHOUSE:	NO.117 EV	<u> </u>	454-	2030	
DRIVER: SEE TICKET			- !		
TRAIN ID:	ORIGI	N:	-	int	named and addition
WASTE TYPE: SON COM- DISPOSAL:	ar Ren	PFICIAL LISE	- -	oon pick-up)	
REMARKS:		CT NITOC COO	I -	essories are in ge	ood condition
material is being			S d do	or ratchets are se	cured tightly
cylclarect as voa	d bed a	and fill	er is	empty and clean	
material			_		
			rps	and tarp bows ha	ive been remove

removed reaving the entire contained truck nee or obstructions prior to loading. After loading, the transporter is to clean and remove all debris on the outside of the contamer/truck, replace the roof bows, and secure the tarp prior to leaving the job site.

54153

(tons)

 $M\ddot{0}$

Departure Time:

Remarks:

iver Name (Please Print)



A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267647

W. 2010-11		489528
DATE:/TIME:	CC124 2:45pm	S-1
LOAD DATE:		
CUSTOMER NAME: WMC	/ waastatt	(tons)
PROFILE NUMBER:	489528	structions:
TRUCK NUMBER:	505	
TRAILER/CONTAINER NUMBER:	505T	
SEAL NUMBER:		sponce Telphone #: (800) 424-9300
CUSTOMER INVOICE NO .:	54144	
		ctors Representative)
, GROSS WEIGHT:	103660	
TARE WEIGHT-TRACTOR:	<u> </u>	Date
TARE WGTTRAILER/CONTAINER:	37760	
		ame & Address:
NET WEIGHT:	<u></u> 65840	andfill & Recycling Facility
		gs Lane 7812
GATEHOUSE:		454 2020
DRIVER: SEE TICKET UC42	256	454-2030
TRAIN ID: O	RIGIN:	
WASTE TYPE: SUI (Unt Lec	ed .	
DISPOSAL: <u>CM DC</u>	seneticial use	on (Upon pick-up)
REMARKS:		nd accessories are in good condition
material is being a cyrid area as fill and	13/01 IN MSB(STOS	nd door ratchets are secured tightly ner is empty and clean
material	a road Deal	is in our and cloud
That color		
Teaving_ine-envire-comamenturiok-nico-ox-oostraca		tarps and tarp bows have been removed the transporter is to clean and remove all
debris on the outside of the container/truck, replace	ce the roof bows, and secure the t	arp prior to leaving the job site.
Linda Androws	Tolina)	
Driver Name (Please Print)	Signature	Date
Remarks:		
		!

 $M\bar{0}$

Departure Time:

54144



A Waste Management Company

No

75298 :

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267646

Remarks:

DATE:/TIME: Time (Ilam 28 oct 97	489528
LOAD DATE: CUSTOMER NAME: LUTYIU/	uxiastaff	DirT
PROFILE NUMBER:	489528	(tons)
TRUCK NUMBER: TRAILER/CONTAINER NUMBER:	89	structions:
SEAL NUMBER:	7-222	
CUSTOMER INVOICE NO.:	75298	ctors Representative)
GROSS ·WEIGHT:	101600	
TARE WEIGHT-TRACTOR:	111-200	Date
TARE WGTTRAILER/CONTAINER:	46320	ame & Address:
NET WEIGHT:	_552 <i>\$</i> ()	andfill & Recycling Facility
GATEHOUSE:	. \/	7812
DRIVER: See ticket 004265) 454-2030
TRAIN ID: ORIGII WASTE TYPE: <u>SUIT</u> CONT LEGI		OWNBOXES_
DISPOSAL: CM DC BEN	0(-1)	on (Upon pick-up)
REMARKS:		nd tarp accessories are in good condition
Being used in Aspesto as fill material and rea	a bed muternal	and door ratchets are secured tightly iner is empty and clean
It is the transporters responsibility to install plastic line leaving the entire container/truck free of obstructions patches on the outside of the container/truck, replace the	DITION to loading. After loading	the transporter is to clean and remove all
TONY FAULT	1200	12-37
Driver Name (Please Print)	Signature	Date



A Waste Management Company

 $N_{\tilde{0}}$

Departure Time:

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267645

Remarks:

DATE:/TIME:	Time 8:39am 28 Oct 97	Soil
LOAD DATE: CUSTOMER NAME: (()) PROFILE NUMBER: TRUCK NUMBER:	489528	uctions: (tons.
TRAILER/CONTAINER NUMBER: SEAL NUMBER: CUSTOMER INVOICE NO.:	505 505 T 7 5 29 8	once Telphone #: (800) 424-9300
GROSS WEIGHT: TARE WEIGHT-TRACTOR:	102640	rs Representative) 1
TARE WGTTRAILER/CONTAINER	R: 37760	e & Address:
NET WEIGHT:		fill & Recycling Facility Lane
GATEHOUSE: DRIVER: See ticket # o TRAIN ID: WASTE TYPE: COIL CONT/ DISPOSAL: GM-DC REMARKS: Inatenal is I	ORIGIN: Liad Beneficial use a being used area as fill	4-2030 Upon pick-up) ccessories are in good condition door ratchets are secured tightly is empty and clean
debris on the outside of the container/truck, replaced the container the contain	the roof bows, and secure the tark pri	s and tarp bows have been removed transporter is to clean and remove all for to leaving the job site.

 $N_{\ddot{0}}$

Departure Time:

54141-



Oregon Waste Systems

A Waste Management Company

18177 Cedar Springs Lane Arlington, Oregon 97812 (541) 454-2030

Nº 267450

DATE:/TIME:	J:24 AM 31 OCT 97	489526
LOAD DATE:		ion: SOL
CUSTOMER NAME: PROFILE NUMBER: TRUCK NUMBER: TRAILER/CONTAINER NUMBER: SEAL NUMBER:	TRUCK NO 427845	ng Instructions:
CUSTOMER INVOICE NO.:	54141	Il Responce Telphone #: (800) 424-9300
GROSS, WEIGHT: TARE WEIGHT-TRACTOR:	ROSS 81400 LB	intractors Representative)
TARE WGTTRAILER/CONTAINER:	TARE 41580 LB	Date
NET WEIGHT:	======================================	ity Name & Address:
GATEHOUSE: DRIVER:	CL Brian	ge Landfill & Recycling Facility prings Lane 97812
TRAIN ID! Seal 29 (WASTE TYPE: Soil Cont.	ORIGIN: OD 507	503) 454-2030
DISPOSAL: CM DE REMARĶS: F/E		<u>66744102653</u>
Good Bed or of See Jahn Bef	tell Material one Supperg	pection (Upon pick-up) ITP and accessories are in good condition oor and door ratchets are secured tightly antainer is empty and clean
·		
• • •		

It is the transporters responsibility to install plastic liner (if required) and insure that tarps and tarp bows have been removed leaving the entire container/truck free of obstructions prior to loading. After loading, the transporter is to clean and remove all debris on the outside of the container/truck, replace the roof bows, and secure the tarp prior to leaving the job site.

Darrell Kiedua Weld

Driver Name (Please Print)

Signature

10-24-9

Date

Remarks:

THE CHARLES OF THE PROPERTY OF THE PARTY OF

APPENDIX B ANALYTICAL DATA



Philip Environmental Laboratory 955 Powell Avenue S.W. Renton, WA 98055-2908 TEL 206.227.6110 FAX 206.227.6196

Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97 Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY
Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-02-2

Profile #:

Lab ID: AA29392

Analyte Method Result Units
METALS

Total Metals
Lead EPA 6010 7.23 mg/Kg



Philip Environmental Laboratory 955 Powell Avenue S.W. Renton, WA 98055-2908 TEL 206.227.6110 FAX 206.227.6196

Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-02-5

Profile #:

Lab ID: AA29393

Analyte Method Result Units

Total Metals
Lead EPA 6010 7.14 mg/Kg



Philip Environmental Laboratory 955 Powell Avenue S.W. Renton, WA 98055-2908 TEL 206.227.6110 FAX 206.227.6196

Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

20,00

Generator: WAGSTAFF BATTERY

Work Order No.:

Sample Collected: 10/29/97

Project Name: WAGSTAFF BATTERY

P.O. No.:

Received Date: 10/29/97

Project No: 18572

Job Number: 97100176

Client ID: B-02-8

Profile #:

Lab ID: AA29991

Analyte Method Result Units

Total Metals
Lead EPA 6010 7.09 mg/Kg

...



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290 PORTLAND = (503) 643-9200 = FAX 644-2202

Philip Environmental-Vancouver 7117 N.E. 47th Ave, Suite B Vancouver, WA 98661 Project: Wagstaff
Project Number: none

Sampled: 10/29/97 Received: 10/29/97

Project Manager: David Jacobs

Reported: 11/7/97 14:47

Dry Weight Determination North Creek Analytical - Portland

Sample Name	Lab ID	Matrix	Result	Units
‡7 Southwall	P710529-01	Soil	84.8	%
Sottom 24'	P710529-02	Soil	81.9	%
Stockpile composite	P710529-03	Soil	79.8	%

North Creek Analytical, Inc.

Howard Holmes. Project Manager



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290 PORTLAND = (503) 643-9200 = FAX 644-2202

nilip Environmental-Vancouver 117 N.E. 47th Ave, Suite B ancouver, WA 98661 Project: Wagstaff
Project Number: none
Project Manager: David Jacobs

Sampled: 10/29/97 Received: 10/29/97

Reported: 11/7/97 14:47

Total Metals per EPA 6000/7000 Series Methods/Quality Control North Creek Analytical - Portland

	Date S ₁	pike Sample	QC	R	eporting Limit R	lecov.	RPD	RPD
.nalyte	Analyzed L	evel Result	Result	Units	Recov. Limits	%	Limit	% Notes*
itch: 1070710	Date Prepared: 1070710-BLK1	Date Prepared: 10/29/97		Extraction Method: EPA 3050				
Hank end	10/30/97		ND	mg/kg dr	y 10.0			
	<u>1070710-BS1</u> 10/30/97	100	104	mg/kg dr	y 80.0-120	104		
<u>aplicate</u> ead	1070710-DUP1 10/30/97	<u>P710499-01</u> 28.2	21.7	mg/kg dr	y		40.0	26.1
atrix Spike	1070710-MS1 10/30/97	<u>P710499-01</u> 112 28.2	135	mg/kg dr	y 75.0-125	95.4		

orth Creek Analytical, Inc.

"Refer to end of report for text of notes and definitions.

iward Holmes, Project Manager



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE (509) 924-9200 FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

ilip Environmental-Vancouver 117 N.E. 47th Ave, Suite B ancouver, WA 98661

Project: Wagstaff Project Number: none

Sampled: 10/29/97

Received: 10/29/97

Project Manager: David Jacobs Reported: 11/7/97 14:47

TCLP Metals per EPA 1311/6000/7000 Series Methods/Quality Control North Creek Analytical - Portland

	Date	Spike	Sample	QC		Reporting Limit	Recov.	RPD	RPD	
nalyte	Analyzed	Level	Result	Result	Units	Recov. Limits	%	Limit	%	Notes*
tch: 1170150	Date Prepared		•		Extrac	tion Method: EP.	A 200/30	<u>05</u>		
<u>iank</u> and	11/7/97	_		ND	mg/l	0.200				
<u>.:S</u> :ad	1170150-BS1 11/7/97	5.00		4.91	mg/l	75.0-125	98.2			
utrix Spike ad	1170150-MS1 11/7/97	<u>P71</u> 5.00	0595-01 ND	4.85	mg/l	50.0-150	97.0			

nh Creek Analytical, Inc.

ward Holmes, Project Manager

*Refer to end of report for text of notes and definitions.

18939 120th Avenue N.E., Suite 101, Bothell, WA 98011-9503 East 11115 Montgomery, Suite B. Sockare, WA 99005-4775



ilip Environmental-Vancouver 117 N.E. 47th Ave, Suite B Jancouver, WA 98661 Project: Wagstaff

Project Number: none

Project Manager: David Jacobs

Sampled: 10/29/97

Received: 10/29/97

Reported: 11/7/97 14:47

Notes and Definitions

	Note
`ET	Analyte DETECTED
٩Ď	Analyte NOT DETECTED at or above the reporting limit
ξ	Not Reported
гу	Sample results reported on a dry weight basis
cov.	Recovery
כוני	Relative Percent Difference

orth Creek Analytical, Inc.

ward Holmes, Project Manager

18939 120th Avenue N.E., Suite 101, Botheil, WA 98011-9508 East 11115 Monroomery, Suite B. Sockine, WA 3920544TE



Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/29/97

Received Date: 10/29/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-02-10

Profile #:

Lab ID: AA29992

Analyte Method Result Units

Total Metals
Lead EPA 6010 6.73 mg/Kg



Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-902-2

Profile #:

Lab ID: AA29398

Analyte Method Result Units

Total Metals
Lead EPA 6010 7.74 mg/Kg



Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-03-2

Profile #:

Lab ID: AA29394

Analyte Method Result Units

Total Metals
Lead EPA 6010 7.67 mg/Kg



Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-03-5

Profile #:

Lab ID: AA29395

Analyte Method Result Units

Total Metals
Lead EPA 6010 8.15 mg/Kg



Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Generator: WAGSTAFF BATTERY

Work Order No.: P.O. No.:

Sample Collected: 10/29/97

Project Name: WAGSTAFF BATTERY

Job Number: 97100176

Received Date: 10/29/97 Project No: 18572

Client ID: B-03-8

Profile #:

Lab ID: AA29993

Analyte Method Result Units

Total Metals
Lead EPA 6010 6.37 mg/Kg



Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/29/97

Received Date: 10/29/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-03-10

Profile #:

Lab ID: AA29994

Analyte Method Result Units

Total Metals
Lead EPA 6010 5.51 mg/Kg



Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97 Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-04-2

Profile #:

Lab ID: AA29396

Analyte Method Result Units

Total Metals
Lead EPA 6010 6.36 mg/Kg



Analytical Report

To: DAVID BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/15/97

Received Date: 10/16/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-04-5

Profile #:

Lab ID: AA29397

Units Method Result Analyte **Total Metals** EPA 6010 8.37 mg/Kg Lead

ı;



Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Generator: WAGSTAFF BATTERY

Work Order No.:

Sample Collected: 10/29/97

Project Name: WAGSTAFF BATTERY

P.O. No.:

Received Date: 10/29/97

Project No: 18572

Job Number: 97100176

Client ID: B-04-8

Profile #:

Lab ID: AA29995

Analyte Method Result Units

Total Metals
Lead EPA 6010 6.14 mg/Kg



Analytical Report

To: DAVE BROTEN 955 Powell Ave SW Renton WA 98055

Report Date: 10/30/97

Sample Collected: 10/29/97

Received Date: 10/29/97

Generator: WAGSTAFF BATTERY

Project Name: WAGSTAFF BATTERY

Project No: 18572

Work Order No.:

P.O. No.:

Job Number: 97100176

Client ID: B-04-10

Profile #:

Lab ID: AA29996

Units Method Result Analyte **Total Metals** mg/Kg EPA 6010 6.74 Lead

Data Reviewed By: Son

Data Reported By



Chain-of Custody Record

955 Powell Avenue, Southwest (206) 227-0311 Phone Renton, WA 98055 (206) 227-6191 FAX (P.O. Box 3552, Seattle 98124)

COC Serial No. F 3220

					,
Project Name		Type of Analysis			
Project Number Phase . Task	•			\ \ \ \	\ \ _
Samplers					\
Laboratory Name Thilly SylCs		Numb			
Location				\	on the second second
Sample Number (and depth) Date Time	Matrix	14.9/			Comments
	***	X			
· · · · · · · · · · · · · · · · · · ·		X			was and
(- (-) 1					
$\frac{1}{1} \frac{(n! - \sqrt{2})^2}{2!} = \frac{ a s/2}{2!} \frac{ a s}{2!} \frac{ a s}$	301	×		1W 17 31:	731.
0510 641-67		<u>×</u>		100)137
0001 0 84-1001	'	1 X Milly			
0.001)	1 14 10 10 6			
15 · 03 · · · · · · · · · · · · · · · · ·		×		W. J	W. M.Sh
n visits IoAO		1 *			
· 63 · 8 • 1050	0	- - - - -			
3, 52 10 6 V 1100) 	- x - 4			
Relinquished by:			Received By:		
Signature	Date	Time	Signature	Date	Time
	10/11/01	1000	dhnash Monds	10111177	10.74
Samples Iced: Yes No	Carrier:			1	
Preservatives (ONLY for Water Samples)	Shipping and Lab Notes:	- E 144	8-12-10, 8-02-6,	1. 1. 18 1 18 10 1	
: Analysis	# m. m 1 1 1 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1		The state of the state of the state of	THE THEFT	
TPH (418.1) Sulfuric acid (H2SO4)	8 <u>9</u>	charamples results	•		
Other (Specify)			47	HITTIGHTY	
C) Other (opecity)				1	



Chain-of Custody Record

955 Powell Avenue, Southwest (206) 227-0311 Phone Renton, WA 98055 (206) 227-6191 FAX (P.O. Box 3552, Seattle 98124)

COC Serial No. F 3222

	1 'ú	49/11/196					Other (Specify)
				150 IIS	shought results	Sulfuric seld (H2SO4)	17PH (418.1)
-	1815 18 18 18 18 18 18	TCLP onelysis in	Offar Shaple	1.			ilc Anelysis
	Parkerson ag han M-1111	, . (11-70 ::	-		Shipping and Lab	er Samples) Sodlum hyroxide (NaOH)	Y for Wat
	Airbill No.	·			Carrler:	- No	Samples Iced: Yes
1.1.1	10.10.11	DHILL	ark Irmun	7.00	116/4	16,	
Time	Date 17.17.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7	iture	Sig	Time	Date ///		Signature
			Received By:				Relinquished by:
				1.5			
					-		
-							
				•			•
- -	1 1/11/1/201			×	1 100	GN0 -11/5/1	B-702-2 10
111770	21.17		i j.	ж.	1	(15-11)	1, (1, 1)
11.11 / 1 / 1	1).11.		15/1.1/2	1 m 1/1/2		OPII	11.01.2
10/1/02),			×		7, 1130	N (4 5
M. M. W.	KIN A			×	(S)	19 11 1	1 1 1 - 2 K
Comments					Matrix	Date Time	Sample Number (and depth)
Okravovska 100					otal N	A CARLO CARL	Location
			\ \ \		Numb		Laboratory Name
\ 		\ \ \	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \		er of		Samplers The Control of the Control
				Analysis and Bottle	Bottle	Phase . Task	
			/,0/	Type of	s	EMBEL V	Project Name (1971)



Analytical Report

To: DAVID BROTEN 955 POWELL AVE SW **RENTON, WA 98055**

Work Order No.:

P.O. No.: Job Number: 97100150

Report Date: 10/16/97

Sample Collected: 10/14/97

Received Date: 10/15/97

Generator: PASC

Project Name: WAG STAFF BATTERY

Project No: 18572

Client ID: B-05-S

Profile #:

Lab ID: AA29267

Result

Analyte

METALS Total Metals

Lead

EPA 6010

Method

139

mg/Kg

Units



Analytical Report

To: DAVID BROTEN 955 POWELL AVE SW RENTON, WA 98055

Work Order No.:

P.O. No.:

Job Number: 97100150

Report Date: 10/16/97 Sample Collected: 10/14/97

Received Date: 10/15/97

Project Name: WAG STAFF BATTERY

Project No: 18572

Generator: PASC

Client ID: B-06-S

Profile #:

Lab ID: AA29268

Analyte

Total Metals Lead

EPA 6010

Method

22.2

Result

mg/Kg

Units



Analytical Report

To: DAVID BROTEN 955 POWELL AVE SW RENTON, WA 98055

Work Order No.:

P.O. No.:

Job Number: 97100150

Report Date: 10/16/97

Sample Collected: 10/14/97 Received Date: 10/15/97 Project Name: WAG STAFF BATTERY Project No: 18572

Generator: PASC

Client ID: B-07-S

Profile #:

Lab ID: AA29269

Analyte Method Result Units

Total Metals
Lead EPA 6010 27.5 mg/Kg

Data Reviewed By:

Data Reported By:



Chain-of Custody Record

955 Powell Avenue, Southwest (206) 227-0311 Phone Renton, WA 98055 (206) 227-6191 FAX (P.O. Box 3552, Seattle 98124)

COC Serial No. [= 3213

	סטא טטטב, טפמווופ	50124)			
Project Name WAG STAFF BAHERY		Type of			
붉	•	and Bol			\ \ \ \
1/-					
Laboratory Name PASC		Numb			
Location		<u> </u>		\	
Sample Number (and depth) Date Time	Matrix	7		Con	nments
B-05-S IdHAY 1510	Sal	- - ≺		LOCKE W	70
B-04-S 15:00	2 1	<u>~</u>		213	93
B-07-S V 15:05	<	- ⊀		car 1	pa

Relinquished by:			Received By:		
Signature	Date	Time	nature		Time
Mayer Broken 1	10/14/97	Son	Morace Monar	totally to	90
Samples Iced: Yes No	Carrier:			Airbill No.	
NLY for Water Samples)Sodiu lc Analysis	Shipping and Lab Notes:	l Lab Notes:	24 HOUR RUSH!!	1148	
TPH (418.1)				05/01/FD#	
				•	



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

hilip Environmental - Vancouver

117 NE 47th Ave. Jancouver, WA 98661 Project: WAGSTAFF

Project Number: 18572

Project Manager: David Jacobs

Sampled: 10/14/97

Received: 10/15/97

Reported: 10/28/97 16:49

ANALYTICAL REPORT FOR SAMPLES:

	•		
ımple Description	Laboratory Sample Number	Sample Matrix	Date Sampled
3-01-9	P710301-01	Soil	10/14/97
-01-12	P710301-02	Soil	10/14/97
`-01-15	P710301-03	Soil	10/14/97

inth Creek/Analytical, Inc.

The results in this report apply to the samples analyzed in accordance with the chain of custody document.

This analytical report must be reproduced in its entirety.



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

Philip Environmental - Vancouver

Project:

WAGSTAFF

Sampled: 10/

10/14/97

7117 NE 47th Ave.

Project Number:

18572

Received:

10/15/97

Vancouver, WA 98661

Project Manager: David Jacobs

Reported: 10/28/97 16:49

Total Recoverable Petroleum Hydrocarbons per EPA Method 418.1 North Creek Analytical - Portland

Analyte	Batch Number	Date Prepared	Date Analyzed	Specific Method	Reporting Limit	Result	Units	Notes*
B-01-9 Petroleum Oil Hydrocarbons	1070453	10/20/97	<u>P7103</u> 0	01-01 EPA 418.1	1000	13100	<u>Soil</u> mg/kg dry	ı
B-01-12 Petroleum Oil Hydrocarbons	1070453	10/20/97	<u>P7103</u> (01-02 EPA 418.1	20.0	334	<u>Soil</u> mg/kg dry	
B-01-15 Petroleum Oil Hydrocarbons	1070453	10/20/97	<u>P7103</u> 0	01-03 EPA 418.1	20.0	ND	<u>Soil</u> mg/kg dry	

North Creek Analytical, Inc.

*Refer to end of report for text of notes and definitions.

Howard Hoimes, Project Manager



BOTHELL = (425) 431-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

10/14/97

10/15/97

hilip Environmental - Vancouver

117 NE 47th Ave.

Project: WAGSTAFF

Project Number: 18572

STAFF Sampled: Received:

Project Manager: David Jacobs Reported: 10/23/97 16:49

Polynuclear Aromatic Compounds per EPA 8270M-SIM North Creek Analytical - Portland

	Batch	Date	Date	Surrogate	Reporting			
nalyte	Number	Prepared	Analyzed	Limits	Limit	Result	Units	Notes
							s ::	
<u>-01-9</u>			P71030	01-01			<u>Soil</u>	•
cenaphthene	1070349	10/16/97	10/22/97		168	ND	ug/kg dry	l .
cenaphthylene	•	**	п		168	ND	"	l
nthracene	n	**			168	ND		1
enzo (a) anthracene	H	"	10/24/97		67.0	ND		l -
enzo (a) pyrene	17	17	**		67.0	ND		l
enzo (b) fluoranthene	Ħ	*	**		67.0	ND	**	l
enzo (ghi) perylene	**	rr .	rr ·		67.0	ND	*	.1
enzo (k) fluoranthene	10	**	**		67.0	ND	**	I
hrysene	*	Ħ	н		67.0	ND	**	I
ibenzo (a,h) anthracene	Ħ	**	#		67.0	ND	19	I
luoranthene	H		10/22/97		168	ND	m	1
luorene	Ħ	1f	n		168	ND	н	1
ideno (1,2,3-cd) pyrene	**	#	10/24/97		67.0	ND	11	1
aphthalene	•	Ħ	10/22/97		168	ND	19	1
henanthrene	•	•	19		168	ND	rr .	1
vicue	п	•	10/24/97		67.0	ND	н	ı
urrogate: 2-Fluorobiphenyl	"	"	10/22/97	30.0-115		NR	%	2
urrogate: Nitrobenzene-d5	*	n	**	23.0-120		NR	н	2
urrogate: p-Terphenyl-dl4	"	"	10/24/97	18.0-137		100	"	
<u>-01-12</u>			<u>P7103</u>	<u>01-02</u>			<u>Soil</u>	
cenaphthene	1070349	10/16/97	10/22/97		67.0	ND	ug/kg dry	1
cenaphthylene	•	m .	n		67.0	ND	0	1
nthracene	**	10	10/21/97		6.70	ND	"	
enzo (a) anthracene	**	**	m		6.70	ND	"	
enzo (a) pyrene	**	H	#		6.70	ND	11	
enzo (b) fluoranthene	**	"	#		6.70	ND	н	
enzo (ghi) perylene	•	••	•		6.70	ND	**	
enzo (k) fluoranthene	17	n			6.70	ND	**	
hrysene	•	**	10		6.70	ND		
ibenzo (a.h) anthracene			17		6.70	ИD	**	
luoranthene	"	**	10		6.70	ND	•	
luoranuiene luorene	m	"	10/22/97		67.0	ND	11	I
	n	*	10/21/97		6.70	ND	**	
ideno (1,2,3-cd) pyrene	H	19	10/22/97		67.0	ND	**	i
aphthalene	**	н	10/21/97		6.70	22.0	19	-
'henanthrene	H	**	10/21/97		6.70	ND	17	
yrene urrogate: 2-Fluorobiphenyl			10/22/97	30.0-115	0.70	74.0	%	

orth Creek Analytical, Inc.

Refer to end of report for text of notes and definitions.

oward Hoimes, Project Manager

18939 120th Avenue N.E. Suite 101 (Bothe): WA 98011-9508 East 11115 Montgomery Suite B. Socyare, WA 99236-4775 9405 S.W. Mimbus Avenue, Bequerring CR 97013-7130



ilip Environmental - Vancouver

17 NE 47th Ave. ancouver, WA 98661 Project:

WAGSTAFF

18572

Project Number: David Jacobs Project Manager:

Sampled: Received:

10/14/97 10/15/97

Reported: 10/28/97 16:49

Polynuclear Aromatic Compounds per EPA 8270M-SIM North Creek Analytical - Portland

	Batch	Date	Date	Surrogate	Reporting			
nalyte	Number	Prepared	Analyzed	Limits	Limit	Result	Units	Notes*
01-12 (continued)			P7103	01-02			<u>Soil</u>	
rrogate: Nitrobenzene-d5	1070349	10/16/97	10/22/97	23.0-120		NR	%	3
arrogate: p-Terphenyl-d14	**	"	10/21/97	18.0-137		87.0	"	
<u>01-15</u>			P71030	01-03			Soil	
enaphthene	1070349	10/16/97	10/21/97	Continuo de	6.70	ND	ug/kg dry	
enaphthylene	н	7	н		6.70	ND	"	
thracene	•		н		6.70	ND		
:nzo (a) anthracene	#				6.70	ND	IT	
:nzo (a) pyrene	17	**	**		6.70	ND	н	
nzo (b) fluoranthene	n	n	п		6.70	ND	**	
nzo (ghi) perylene	H	н			6.70	ND	#	
:nzo (ghr) perytene :nzo (k) fluoranthene		н	**		6.70	ND	н	
* *	•	H	н		6.70	ND	11	
rysene benzo (a,h) anthracene	•				6.70	ND	,	
uoranthene		**	н		6.70	ND	17	
norantiene		m			6.70	ND	**	
leno (1,2,3-cd) pyrene	H	H	11		6.70	ND	н	
phthalene	н		**		6.70	ND	19	
.enanthrene	#	•	**		6.70	ND	н	
	17	•	•		6.70	ND	19	
rene rogate: 2-Fluorobiphenyl	7		17	30.0-115		76.6	%	
rrogate: Nitrobenzene-d5	#	,,	"	23.0-120		97.1	"	
	n	"	**	18.0-137		106	n	
rogate: p-Terphenyl-d14				10.0-157		100		

rth Creek Analytical, Inc.

Refer to end of report for text of notes and definitions.

ward Holmes, Project Manager

18939-120th Avenue N.E., Suite 101, Bothell, WA 98011-9508 East 11115 Montgomery, Suite B. Sockare, WA 99205-4716 9405-3 W. Mimplio Avenue, Beaverton, CR 97008-7112



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

nilip Environmental - Vancouver 117 NE 47th Ave. ancouver, WA 98661 Project: WAGSTAFF

Project Number: 18572
Project Manager: David Jacobs

Sampled: 10/14/97 Received: 10/15/97

Reported: 10/28/97 16:49

Conventional Chemistry Parameters per APHA/EPA Methods North Creek Analytical - Portland

ınalyte	Batch Number	Date Prepared	Date Analyzed	Specific Method	Reporting Limit	Result	Units	Notes*
<u>-01-9</u>	1070444	10/18/97	<u>P7103</u> 0	01-01 EPA 9045B		3.53	Soil pH units	
` <u>-01-12</u> H	1070444	10/18/97	<u>P71030</u>	01-02 EPA 9045B		3.39	<u>Soil</u> pH units	
- <u>01-15</u> Ŧ	1070444	10/18/97	<u>P71030</u> 10/18/97	01-03 EPA 9045B		3.56	<u>Soil</u> pH units	

irth Creek Analytical, Inc.

*Refer to end of report for text of notes and definitions.

ward Holmes, Project Manager



Philip Environmental - Vancouver

7117 NE 47th Ave.

Vancouver, WA 98661

Project: WAGSTAFF

Project Number: 18572

Project Manager: David Jacobs

Sampled: 10/14/97

Received: 10/15/97

Reported: 10/28/97 16:49

Dry Weight Determination North Creek Analytical - Portland

Sample Name	Lab ID	Matrix	Result	Units
B-01-9	P710301-01	Soil	75.8	%
B-01-12	P710301-02	Soil	79.3	%
B-01-15	P710301-03	Soil	79.8	%



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9290 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

hilip Environmental - Vancouver

Project:

WAGSTAFF

Sampled: 10/14/97

117 NE 47th Ave.

Project Number: 18572

Received: 10/15/97

ancouver, WA 98661

Project Manager: David Jacobs

Reported: 10/28/97 16:49

Total Recoverable Petroleum Hydrocarbons per EPA Method 418.1/Quality Control North Creek Analytical - Portland

	Date	Spike	Sample	QC	E	Reporting Limit	Recov.	RPD	RPD	
nalyte	Analyzed	Level	Result	Result	Units	Recov. Limits	%	Limit	%	Notes*
atch: 1070453	Date Prepa 1070453-BI		<u> 197</u>		Extracti	on Method: TP	H Freon	Extraction	<u>on</u>	
lank stroleum Oil Hydrocarbons	10/20/97	<u> </u>		ND	mg/kg di	ry 20.0				
CS :troleum Oil Hydrocarbons	1070453-BS 10/20/97	<u>200</u>	· ·	204	mg⁄kg di	ry 50.0-150	102			
uplicate troleum Oil Hydrocarbons	<u>1070453-D</u> 1 10/20/97	<u>UP1 P</u>	710301-01 13100	13100	mg/kg di	гу		50.0	0	

orth Creek, Analytical, Inc.,

iward Holmes, Project Manager

Refer to end of report for text of notes and definitions.



hilip Environmental - Vancouver

117 NE 47th Ave.

/ancouver, WA 98661

WAGSTAFF Project:

Project Number: 18572

Project Manager: David Jacobs Sampled: 10/14/97

Received: 10/15/97

Reported: 10/28/97 16:49

Polynuclear Aromatic Compounds per EPA 8270M-SIM/Quality Control North Creek Analytical - Portland

	Date	Spike	Sample	QC	K	eporting Limit		RPD	RPD	
nalyte	Analyzed	Level	Result	Result	Units	Recov. Limits	%	Limit	%	Notes*
Satch: 1070349	Date Prepa	red: 10/15	/9 7		Extraction	n Method: EP.	4 355 <u>0</u>			
llank	1070349-BI									
cenaphthene	10/21/97			ND	ug/kg dry	6.70				
cenaphthylene	n		•	ND	"	6.70				
nthracene	н			ND		6.70				
diniracene Senzo (a) anthracene	rt .			ND	"	6.70				
* *				ND	н	6.70				
Senzo (a) pyrene	•			ND		6.70				
ienzo (b) fluoranthene	H			ND		6.70				
enzo (ghi) perylene				ND	**	6.70				
lenzo (k) fluoranthene	10			ND	19	6.70				
hrysene	r#			ND	ri	6.70				
Dibenzo (a,h) anthracene	#			ND	n	6.70				
luoranthene				ND	**	6.70				
luorene				ND	H	6.70				
ideno (1,2,3-cd) pyrene	**			ND	n	6.70				
iaphthalene				ND	н	6.70				
henanthrene				ND		6.70				
yrene	,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,,			67.5	17	30.0-115	81.0			
urrogate: 2-Fluorobiphenyl	,,	83.3			,,	23.0-120	94.7			
urrogate: Nitrobenzene-d5		83.3		78.9	,,		107			
urrogate: p-Terphenyl-d14	18	83.3		89.2	.,	18.0-137	107			
<u>.CS</u>	1070349-B	<u>51</u>								
.cenaphthylene	10/21/97	167		135	ug/kg dry		80.8			
enzo (k) fluoranthene	11	167		145	•	50.0-150	86.8			
yrene	**	167		159	4	50.0-1 <i>5</i> 0				
urrogate: 2-Fluorobiphenyl	n	83.3		65.2	"	30.0-115	78.3			
urrogate: Nitrobenzene-d5	"	83.3		77.5	**	23.0-120	93.0			
urrogate: p-Terphenyl-d14	n	83.3		<i>83.2</i>	"	18.0-137	99.9			
<u>Iatrix Spike</u>	<u>1070349-</u> M	S1 P	710243-02							
cenaphthylene	10/22/97	211	ND	176	ug/kg dr	y 50.0-150	83.4			
Benzo (k) fluoranthene		211	ND	180	"	50.0-150	85.3			
yrene	н	211	142	278	**	50.0-150				
urrogate: 2-Fluorobiphenyl	"	105		76.0	7	30.0-115				
urrogate: Nitrobenzene-d5	,,	105		9 3 .0	••	23.0-120	88.6			
urrogate: p-Terphenyl-d14		105		104	••	18.0-137	99.0			

orth Creek Analytical, Inc.

Refer to end of repor: for text of notes and definitions.

oward Holmes, Project Manager

18939 120th Avenue M.E., Suite 101 Bothell, WA 98011-9508 East 11115 Montgomery, Suite B. Sockane, WA 99005-4775 9405 S.W. Mimbur, Avenue Baskerton, CR 97003-7130



Philip Environmental - Vancouver

Project:

Project Manager: David Jacobs

WAGSTAFF

Sampled: 10/14/97

7117 NE 47th Ave. Vancouver, WA 98661 Project Number: 18572

2

Received: 10/15/97

Reported: 10/28/97 16:49

Polynuclear Aromatic Compounds per EPA 8270M-SIM/Quality Control North Creek Analytical - Portland

Analyte	Date Analyzed	Spike Level	Sample Result	QC Result	Re Units	eporting Limit Recov. Limits	Recov. %	RPD Limit	RPD %	Notes*
Matrix Spike Dup	1070349-M	SDI P	710243-02							
Acenaphthylene	10/22/97	211	ND	193	ug/kg dry	50.0-150	91.5	60.0	9.26	
Benzo (k) fluoranthene	•	211	ND	195	•	50.0-150	92.4	60.0	7.99	
yrene	•	211	142	341	•	50.0-150	94.3	60.0	37.5	
Surrogate: 2-Fluorobiphenyl	"	105		82.4	77	30.0-115	78.5			
Surrogate: Nitrobenzene-d5	<i>n</i>	105		98.4	<i>"</i>	23.0-120	93.7			
Surrogate: p-Terphenyl-d14	*	105		113		18.0-137	108			

lorth Creek Analytical, Inc.

*Refer to end of report for text of notes and definitions.

loward Holmes, Project Manager



ilip Environmental - Vancouver

Project: WAGSTAFF

Sampled: 10/14/97

. 17 NE 47th Ave.

ancouver, WA 98661

Project Number: 18572

Received: 10/15/97

Project Manager: David Jacobs

Reported: 10/28/97 16:49

Conventional Chemistry Parameters per APHA/EPA Methods/Quality Control

North Creek Analytical - Portland -

Date Spike Sample QC Reporting Limit Recov. RPD RPD Recov. Limits Analyzed Level Result Result Units % Notes* Limit nalyte

tch: 1070444

-[

Date Prepared: 10/18/97

Extraction Method: Wet Chem

uplicate

1070444-DUP1 P710301-01 10/18/97

3.53

3.53 pH units 0

th Creek Analytical, Inc.

Refer to end of report for text of notes and definitions.

vard Holmes. Project Manager

18939 120th Avenue N.E., Suite 101, Bothell, WA 98011-9508 East 11115 Montgomery, Suite B. Spokane, WA 99206-4775, 9405 S.W. Nimbus Avenue, Beaverton, 18, 97008-7110.

Page 10 of 11



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

ip Environmental - Vancouver

17 NE 47th Ave. acouver, WA 98661

WAGSTAFF Project:

Project Number:

18572

Project Manager: David Jacobs Sampled: 10/14/97

Received: 10/15/97

Reported: 10/28/97 16:49

Notes and Definitions

Note

Reporting limits raised due to dilution necessary for analysis.

The surrogate recovery for this sample is not available due to sample dilution required from high analyte concentration and/or matrix interferences.

The surrogate recovery for this sample cannot be accurately quantified due to interference from coeluting organic compounds present in the sample.

Analyte DETECTED

Analyte NOT DETECTED at or above the reporting limit

Not Reported

Sample results reported on a dry weight basis

ov. Recovery

Relative Percent Difference

th Creek Analytical, Inc.

fard Holmes, Project Manager

18939 (20th Avenue N.E., Suite 101, Bother WA 98011-9508 East 11115 Montgomery, Suite B. Sockara, WA 99006/4778

Chain-of Custody Record

955 Powell Avenue, Southwest Renton, WA 98055 (P.O. Box 3552, Seattle 98124)

(206) 227-0311 Phone (206) 227-6191 FAX

P 710301

coc serial No. F 3221

Project Name W/A 6.5 HOFF	Ц			Type of			(Ao								
1,9 6.1				Analysis		<u></u>	i E	\	\	\	\ \	\	\	` \	\
Project Number 18 J	Phase . Task	•				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		\	\		\	/	\	\	
Samplers BROEN			0 19		1	7	` ``	\	\	\	\ \		\	\	
Name NOT	Name North Creek Appalytica	malylical	quin		. /						\	\		\	
<u> </u>	+16,2 d Do	0	M la	/	**************************************	Š			\	\			\		
Sample Number (and depth)	-	DATE Matrix	юT	\ \	SEC.	×					/			Comments	
B-01-9		7		×	×						-				
13-01-12		<u> </u>			_										
3-01-15	1750			×	×										
		•													
		and the same of the Same													
							1								-
Relinguished by:						Rece	Received By:	 ≿							
Signature		, Date	_	Time				Signature	٥			Date		Time	
1/axed 1/310/2	3	19/15/19	7)88/	Q	Z	na!	Mel	m		0	15110	197	133	9
						·			D						
			_								_				
Samples Iced:	s 「I No	Carrier:									Airb	Airbill No.			
Y for W	Samples)	Shipping and Lab Notes:	nd Lab No	otes:											
Useful Volentie Organic Analysis	Hydrochloric acid	(HCI)													
	Nitric acid (HNO3)	(EON													
[] TPH (418.1) Sulfuric acid (H2SO4)	Sulfuric acid (H2	(\$04)													
Other (Specify)		-													
Cinal Channy															

(_)



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE = (509) 924-9200 = FAX 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

hilip Environmental-Vancouver

117 N.E. 47th Ave 'ancouver, WA 98661 Project: Wagstaff

Sampled: 10/27/97

Received: 10/27/97

Project Number: Project Manager: David Jacobs

Reported: 11/12/97 09:17

ANALYTICAL REPORT FOR SAMPLES:

REVISED 11/12/97

ample Description	Laboratory Sample Number	Sample Matrix	Date Sampled
l West Center Bottom 19'	P710461-01	Soil	10/27/97
2 South, Center 12' Wall	P710461-02	Soil	10/27/97
3 West Wall 10'	P710461-03	Soil	10/27/97
‡ East, Center, Bottom 18'	P710461-04	Soil	10/27/97
5 East Wall 8'	P710461-05	Soil	10/27/97
5 North Wall 10'	P710461-06	Soil	10/27/97

orth Creek Analytical, Inc.

The results in this report apply to the samples analyzed in accordance with the chain of custody document. This analytical report must be reproduced in its entirety.

oward Holmes, Project Manager



Sampled: 10/27/97 Received: 10/27/97

Reported: 11/12/97 09:17

ilip Environmental-Vancouver 17 N.E. 47th Ave ncouver, WA 98661 Project:
Project Number:
Project Manager:

Project Manager: David Jacobs

Total Metals per EPA 6000/7000 Series Methods

Wagstaff

- REVISED 11/12/97 North Creek Analytical - Portland

nalyte	Batch Number	Date Prepared	Date Analyzed	Specific Method	Reporting Limit	Result	Units	Notes*
aryte	114111001	rrepared	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Memod		1103011	Omo	1.0103
West Center Bottom 19'			P71046	<u>51-01</u>			Soil	
ad	1070652	10/28/97	10/28/97	EPA 6010A	100	3750	mg/kg dry	
South, Center 12' Wall			P71046	51-02			Soil	
ad	1070652	10/28/97	10/27/97	EPA 6010A	10.0	67.1	mg/kg dry	
West Wall 10'			P71046	51 <u>-03</u>			Soil	
br	1070652	10/28/97	10/27/97	EPA 6010A	10.0	383	mg/kg dry	
East, Center, Bottom 18'			P71046	<u>51-04</u>			Soil	
ıd	1070652	10/28/97	10/27/97	EPA 6010A	10.0	ND	mg/kg dry	
1q	1070652	10/28/97	10/27/97	EPA 6010A	10.0	17.2	mg/kg dry	
North Wall 10'			P71046	<u> 51-06</u>			Soil	
'd	1070652	10/28/97	10/27/97	EPA 6010A	10.0	ND	mg/kg dry	

th Creek Analytical, Inc.

*Refer to end of report for text of notes and definitions.

ward Holmes, Project Manager



BOTHELL = (425) 481-9200 = FAX 485-2992 SPOKANE **(509)** 924-9200 **FAX** 924-9290

PORTLAND = (503) 643-9200 = FAX 644-2202

hilip Environmental-Vancouver

Project: Wagstaff

Sampled:

117 N.E. 47th Ave

Project Number:

10/27/97 10/27/97

ancouver, WA 98661

Project Manager: David Jacobs

Received:

Reported: 11/12/97 09:17

TCLP Metals per EPA 1311/6000/7000 Series Methods North Creek Analytical - Portland

nalyte	Batch Number	Date Prepared	Date Analyzed	Specific Method	Reporting Limit	Result	Units	Notes*
1 West Center Bottom 19'	1170092	10/29/97	<u>P71046</u> 11/5/97	61-01 EPA 6010A	2.00	74.7	<u>Soil</u> mg/l	
3 West Wall 10' ead	1170092	10/29/97	<u>P71046</u> 11/5/97	61-03 EPA 6010A	0.200	ND	<u>Soil</u> mg/l	



iilip Environmental-Vancouver

117 N.E. 47th Ave ancouver, WA 98661 Project:

Wagstatf

Sampled: 10/27/97

Received: 10/27/97

Project Number: Project Manager: David Jacobs

Reported: 11/12/97 09:17

Dry Weight Determination

REVISED 11/12/97 North Creek Analytical - Portland

mple Name	Lab ID	Matrix	Result	Units
West Center Bottom 19'	P710461-01	Soil	79.1	%
South, Center 12' Wall	P710461-02	Soil	81.2	%
West Wall 10'	P710461-03	Soil	77.7	%
East, Center, Bottom 18'	P710461-04	Soil	87.3	%
East Wall 8'	P710461-05	Sail	78.9	%
North Wall 10'	P710461-06	Soil	82.8	%

irth Creek Analytical, Inc.

ward Holmes, Project Manager



Philip Environmental-Vancouver

Project: Wagstaff

Sampled: 10/27/97

7117 N.E. 47th Ave

Project Number:

Received: 10/27/97

Vancouver, WA 98661

Project Manager: David Jacobs

Reported: 11/12/97 09:17

Total Metals per EPA 6000/7000 Series Methods/Quality Control

Total Metals per EPA 6000/7000 Series Methods/Quality Contro REVISED 11/12/97 North Creek Analytical - Portland

	Date	Spike	Sample	QC	I	Reporting Limit	Recov.	RPD	RPD	
Analyte	Analyzed	Level	Result	Result	Units	Recov. Limits	%	Limit	%	Notes*
Batch: 1070652 Blank	<u>Date Prepa</u> 1070652-BI		<u> 197</u>		Extracti	on Method: Me	<u>tals</u>			
Lead	10/27/97			ND	mg/kg d	y 10.0				
LCS Lead	<u>1070652-BS</u> 10/27/97	<u>51</u> 100		98.0	mg/kg di	ry 80.0- 120	98.0			
<u>Duplicate</u> Lead	<u>1070652-DU</u> 10/28/97	<u>JP1 P</u>	7 <u>10461-01</u> 3750	2400	mg/kg d	-y		40.0	43.9	1,2
Matrix Spike	1070652-M	<u>S1 P</u>	710461 <u>-01</u>							

North Creek Analytical, Inc.

Refer to end of report for text of notes and definitions.

Howard Holmes, Project Manager



ilip Environmental-Vancouver

117 N.E. 47th Ave

ancouver, WA 98661

Project:

Wagstaff

Sampled: 10/27/97

Received: 10/27/97

Project Number: Project Manager:

David Jacobs

Reported: 11/12/97 09:17

TCLP Metals per EPA 1311/6000/7000 Series Methods/Quality Control North Creek Analytical - Portland

	Date	Spike	Sample	QC		Reporting Limit	Recov.	RPD	RPD	
nalyte	Analyzed	Level	Result	Result	Units	Recov. Limits	%	Limit	%	Notes*
tch: 1170092	Date Prepared		<u>7</u> .		Extract	tion Method: EP,	A 1311/3	<u>010</u>		
ank ad	11/5/97	_		ND	mg/l	0.200				
:S :ad	1170092-BS1 11/5/97	5.00		4.84	mg/l	75.0-125	96.8			
utrix Spike and	1170092-MS1 11/5/97	<u>P71</u> 5.00	0461-01 74.7	78.5	mg/l	50.0-150	76.0			

th Creek Xnalytical, Inc.

vard Holmes, Project Manager

Refer to end of report for text of notes and definitions.



ilip Environmental-Vancouver

117 N.E. 47th Ave uncouver, WA 98661 Project:

Wagstaff

Sampled: 10/27/97

10/27/97 Received:

Project Number:

Project Manager: David Jacobs

Reported: 11/12/97 09:17

Notes and Definitions

REVISED 11/12/97

Note

The RPD is above the control limit due to a non-homogeneous sample matrix.

The RPD and/or percent recovery for this QC spike sample cannot be accurately calculated due to the high concentration of analyte already present in the sample.

- T Analyte DETECTED
- Analyte NOT DETECTED at or above the reporting limit
- Not Reported
- Sample results reported on a dry weight basis
- Relative Percent Difference

orth Creek Analytical, Inc.

iward Holmes, Project Manager

+20th Avenue N E., Suite 101, Bottlell, WA 98011-9508 East 11115 Montgomer. Suite B. Spokane. WA 99206-4776 9475 S.W. Nimbus 44-hue. Beaverton, 0R 97908-7130

Page 7 of 7



ANALYTICA

9405 S.W. Nimbus Avenue. Beavenon, OR 97008-71.12 (50.1) 643-9200 FAX 641-2202 East 11115 Mongonwry, Suite B. Spokane, WA 99206-4779 (509) 924-9200 FAX 924-9290 18939 120th Avenue N.E., Suite 101, Buthell, WA 98011-9508 (206) 481-9200 FAX 485-2992

Work Order # P71046

CHAIN OF CUSTODY REPORT

DATE (0 29-47 TIME 12:30 DVIE/[]/3.7/7] How Turnarand TIME (100 * Turnaround Requests less than stundard may inque Rush Charges. Gum COMMENTS TURNAROUND REQUEST in Business Days 5 3-4 2 1 Sume 770 24h 24 h 10 7 5 4 3 2 NID CONTAINERS OTHER KARICINE The Clar UM SINGLA DATE: 10-27-97 RECEIVED BY INGENEED NCA QUOTE #: ATTENTION Philip Environmenta DATE: 10 27-97 RECEIVED BY ISSURANTE TIME: 123C) PRINTHAME: TIME: /2.0 BOM PRINT NAME: ADDRESS: PAT BAX 3552 P.O. NUMBER: UNG, Staff INVOICE TO: FIRM: Philip Snul. Lubertutory Use Only) NCA SAMPLE ID FAX: 360 737-2349 MANITONAL REMARKS! SUMPLIE - if HOT, MAN TOLF 04:11 7 5/01 # 4 East, Center, Bottom 18" 1427 11:15 #2 South, Center 12 hall 1967 11:3 65:11 1.00 G21/16/01 Vancouver WA 9866 #1 West, Certic Billow 19 10107 11:10 SAMPLING PILITOLISIED BY DEFERENCE PARTY A MARKET 7117 N.E. 475AM Dhilip L JOHNSTA Jahrson Norman David Jacobs PROJECT NAME WAG STAFF 360-737-1943 #3 West Wall 10' INERTHAME (I'MY SAMULLE North well 18" #5 East Wall 8" DENTIFICATION KI I INCITISHED BY (Section) ININT NAME: MANIFED BY: KFPORT TO:



nilip Environmental-Vancouver 117 N.E. 47th Ave, Suite B ancouver, WA 98661 Project: Wagstaff
Project Number: none

Sampled: 10/29/97 Received: 10/29/97

Project Manager: David Jacobs

F

Reported: 11/7/97 14:47

ANALYTICAL REPORT FOR SAMPLES:

•			į
unple Description	Laboratory Sample Number	Sample Matrix	Date Sampled
7 Southwall	P710529-01	Soil	10/29/97
ottom 24'	P710529-02	Soil	10/29/97
ockpile composite	P710529-03	Soil	10/29/97

orth Creek Analytical, Inc.

The results in this report apply to the samples analyzed in accordance with the chain of custody document.

This analytical report must be reproduced in its entirety.

sward Holmes, Project Manager

18939 120th Avenue N.E., Suite 101, Bothert WA 98011-9508 East 11115 Montgomery, Suite B. Sporting, AA 39006-4778



ilip Environmental-Vancouver 17 N.E. 47th Ave, Suite B ancouver, WA 98661 Project: Wagstaff
Project Number: none

Sampled: 10/29/97

Received: 10/29/97

Project Manager: David Jacobs

Reported: 11/7/97 14:47

Total Metals per EPA 6000/7000 Series Methods North Creek Analytical - Portland

nalyte	Batch Number	Date Prepared	Date Analyzed	Specitic Method	Reporting Limit	Result	Units	Notes*
Southwall =ad	1070710	10/29/97	<u>P71053</u> 10/30/97	29-01 EPA 6010A	10.0	13.3	<u>Soil</u> mg/kg dry	
ttom 24'	1070710	10/29/97	<u>P71053</u> 10/30/97	<u>19-02</u> EPA 6010A	10.0	33.6	<u>Soil</u> mg/kg dry	
ockpile composite	1070710	10/29/97	<u>P71052</u> 10/30/97	29-03 EPA 6010A	10.0	99.6	<u>Soil</u> mg/kg dry	

rth Creek Analytical, Inc.

Haulus Tulus ward Holmes, Project Manager *Refer to end of report for text of notes and definitions.

13939 120th Avenue N.E. Suite 101 (31174) WA 98011-9508 Eact 11115 Mantgomery Suite B. Sockaire WA 19006-4776



Philip Environmental-Vancouver /117 N.E. 47th Ave. Suite B /ancouver, WA 98661 Project: Wagstatf

Project Number: none

Project Manager: David Jacobs

Sampled: 10/29/97

Received: 10/29/97

Reported: 11/7/97 14:47

TCLP Metals per EPA 1311/6000/7000 Series Methods North Creek Analytical - Portland

\nalyte	Batch Number	Date Prepared	Date Analyzed	Specific Method	Reporting Limit	Result	Units	Notes*
itockpile composite	1170150	11/4/97	<u>P71052</u>	29-03 EPA 6010A	0.200	ND	<u>Soil</u> mg/l	

orth Creek Analytical, Inc.

*Refer to end of report for text of notes and definitions.

dward Holmes, Project Manager

18939 120th Avenue N.E., Suite 101 Bothell WA 98011-9508 East 11115 Montgomen, Suite B. Spokiste WA 99006-4716